

AD-A096 197 ARMY MISSILE COMMAND REDSTONE ARSENAL AL GROUND EQU--ETC F/G 17/1
A POLYVINYLIDENE FLUORIDE DIFFERENTIAL MEMBRANE PRESSURE ACOUST--ETC(U)
SEP 80 J A SCHAEFFEL
UNCLASSIFIED DDCMT/DI-RI-4-TR SBIE-AD-E950 096 NL

ARMY MISSILE COMMAND REDSTONE ARSENAL AL GROUND EQU--ETC F/G 17/1
A POLYVINYLIDENE FLUORIDE DIFFERENTIAL MEMBRANE PRESSURE ACOUST--ETC(U)
SEP 80 J A SCHAEFFEL

SBIE-AD-E950 096

NL


END

DATE

FILMED

4.1

DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

13 LEVEL III

AD-E 950 096

AD A 096 197

TECHNICAL REPORT RL-81-4

A POLYVINYLIDENE FLUORIDE DIFFERENTIAL
MEMBRANE PRESSURE ACOUSTICAL
ARRAY TRANSDUCER

John A. Schaeffel, Jr.
Ground Equipment and Missile Structures Directorate
US Army Missile Laboratory

DTIC
ELECTE
S MAR 10 1981 D
B

30 September 1980



U.S. ARMY MISSILE COMMAND

Redstone Arsenal, Alabama 35898

DBG FILE COPY

APPROVED FOR PUBLIC RELEASE,
DISTRIBUTION UNLIMITED


SMI FORM 1021, 1 JUL 79 PREVIOUS EDITION IS OBSOLETE

81 2 2 139

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER TR-RL-81-4	2. GOVT ACCESSION NO. AD-A096 197	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) A Polyvinylidene Fluoride Differential Membrane Pressure Acoustical Array Transducer		5. TYPE OF REPORT & PERIOD COVERED Technical Report
7. AUTHOR(s) John A. Schaeffel, Jr.		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Commander US Army Missile Command ATTN: DRSMI-RL Redstone Arsenal, AL 35898		8. CONTRACT OR GRANT NUMBER(s) DALL162303A214
11. CONTROLLING OFFICE NAME AND ADDRESS Commander US Army Missile Command ATTN: DRSMI-RPT Redstone Arsenal AL 35898		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AMCMS 6123032140911
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE 30 September 1980
		13. NUMBER OF PAGES
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)		
<div style="border: 1px solid black; padding: 5px; text-align: center;"> DISTRIBUTION STATEMENT A Approved for public release; Distribution Unlimited </div>		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
Polyvinylidene Transducer Polyvinylidene Fluoride (PVDF) Ultrasonics Acoustical Transducer Transducer Array Membrane Transducer Differential Membrane Pressure		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)		
This work describes the fabrication of a PVDF array transducer for use in NDT and Experimental Mechanics Applications. The array and its control electronics are described in the report. Specific performance data is also given.		

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

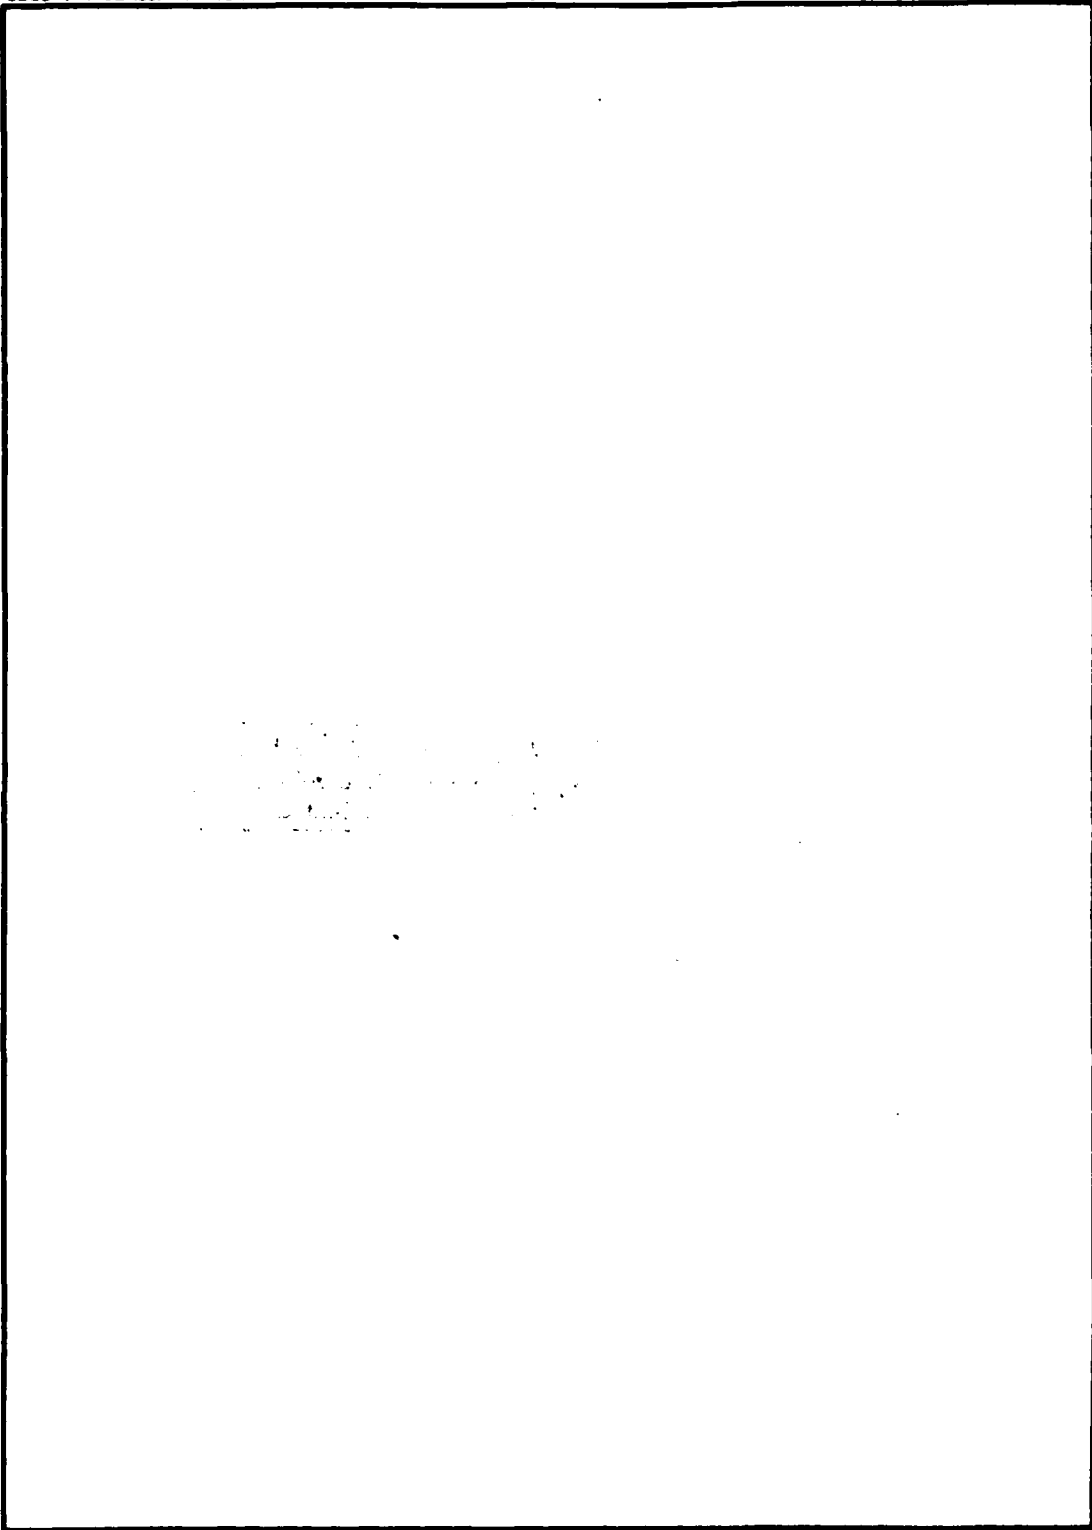

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

Section	Page
I. INTRODUCTION.....	1
II. ARRAY TRANSDUCER CONCEPT.....	1
III. ARRAY FABRICATION AND TESTING.....	8
IV. CONCLUSIONS.....	27
V. APPENDIX.....	A-1

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	

List of Figures

Figure		Page
1.	Cross Sectional View of PVDF Ultrasonic Transducer Design Concept.....	1
2.	Circular Membrane of Radius (a) Deflected Under a Differential Pressure (P).....	3
3.	Transducer Focal Length Versus Differential Membrane Pressure....	4
4.	Near Field Length Versus Frequency for a .5 Inch Diameter Transducer in Water.....	6
5.	Schematic of PVDF Membrane.....	7
6.	Front and Rear Electrode Holders for the PVDF Array Transducer.....	9
7.	Gas Supply Chamber for the PVDF Array Transducer.....	10
8.	Front Mask for Etching the PVDF Membrane.....	11
9.	Back Pressure Plate for the Etching Mask.....	12
10.	Top view of the Assembled PVDF Array Transducer.....	13
11.	Gas Fittings for the PVDF Array Transducer.....	13
12.	Assembled PVDF Array Transducer.....	14
13.	System Control Electronics.....	14
14.	Transducer Electronics Control Panel.....	15
15.	RF Switch System Block Diagram.....	16
16.	Selector Switch Assembly.....	17
17.	Array Transducer Connected to the Electronics System.....	18
18.	Mechanical Block Schematic of PVDF Transducer Gas Supply System.....	21
19.	PVDF Transducer Gas Supply System.....	22
20.	Real-Time Array Performance Viewing System.....	26

List of Tables

Table	Page
1. System Electronic Control Functions.....	19
2. Procedure-1 Receiver Voltages.....	23
3. Procedure-2 Receiver Voltages.....	24
4. Procedure-3 Receiver Voltages.....	25

I. INTRODUCTION

The need for low cost, high output power, broad-band frequency response, variable focal length acoustical transducers is readily established in NDT and Experimental Mechanics applications. A single element transducer was developed [1] in 1979 to meet some of these requirements. The transducer was fabricated from Polyvinylidene Fluoride (PVDF) and featured the following:

- o Low Cost
- o Variable frequency response
- o Variable focal length

The transducer had very low output power but showed great promise for being fabricated into arrays. This report documents the initial effort to package the differential membrane pressure acoustical transducer developed in 1979 into an integrated array.

The present device has the same basic operating characteristics as the previous single element device except that 16 transducers are presently packaged into a single array. It is conceived that large arrays may one day be packaged into units for applications in NDT and Experimental Mechanics.

II. ARRAY TRANSDUCER CONCEPT

Figure 1 illustrates the basic concept of the differential pressure acoustical PVDF membrane transducer. A PVDF membrane with surface deposited electrical conductors is sandwiched between two electrodes. The membrane and acoustical cavity walls form an acoustical cavity into which a gas or liquid is pumped through a pressure control port. By controlling the differential pressure between the acoustical cavity medium and the external acoustical cavity medium, the membrane is made to deflect in approximately a spherical shape as shown.

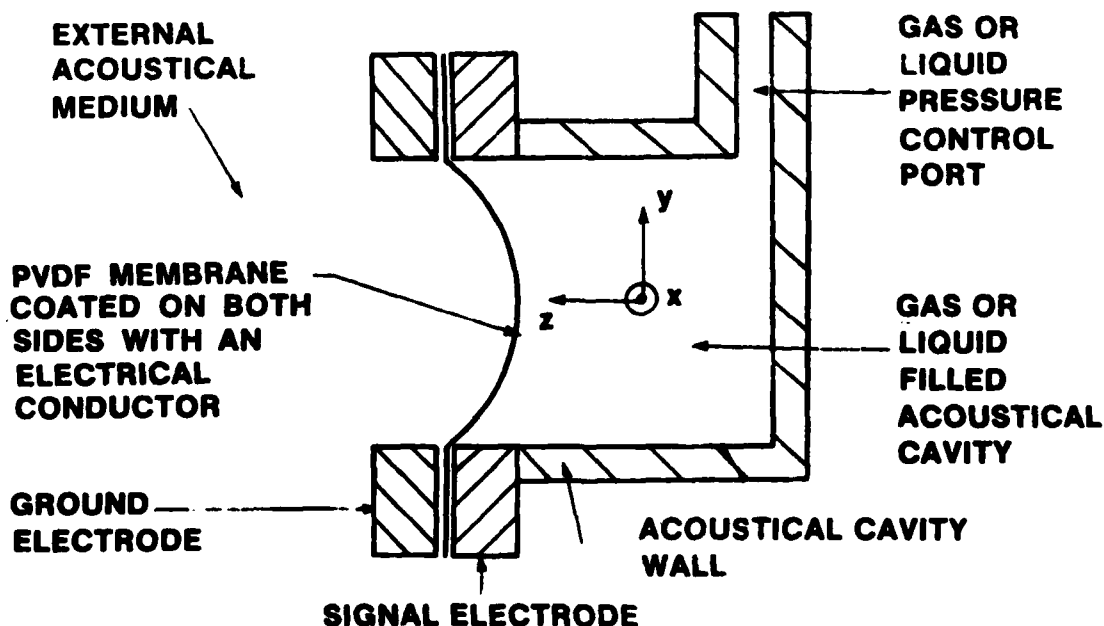


Figure 1. Cross sectional view of PVDF ultrasonic transducer design concept.

If a signal is applied to the two electrodes, the membrane will tend to contract or expand with the polarity of the applied voltage. The expansion is a length-expansion characterized by the piezoelectric constants d_{31} and d_{32} [2] and is tangential to the surface of the membrane. The ultimate result of applying the differential membrane pressure is to introduce a component of motion of the membrane in the z direction as shown in Figure 1.

When driven at ultrasonic frequencies (1-10 MHz), the result is the transmission of an acoustical wave into the external acoustical medium. Assuming that the wave is transmitted normal to the surface of the membrane then the beam will have a focal point determined by the membrane radius. By varying the differential membrane pressure, the focal point position in space is also varied.

When a mechanical stress is applied to an area of piezoelectric material a polarization per unit area P_i (or dipole moment per unit volume) is generated [3], where:

$$P_i = d_{ij} \sigma_j \quad (1)$$

$i = 1, 2, 3$ and $j = 1, 2, 3, 4, 5, 6$

P_i \equiv ploarization per unit area

d_{ij} \equiv piezoelectric moduli (matrix representation)

σ_j \equiv applied stress (matrix representation)

Equation (1) refers to the direct piezoelectric effect.

The converse piezoelectric effect occurs when an electric field is applied to a piezoelectric material and it becomes strained by an amount directly proportional to the electric field strength. For this case:

$$\epsilon_j = d_{ij} E_i \quad (2)$$

ϵ_j \equiv matrix representation of strain

E_i \equiv electric field strength.


As illustrated in Equations (1) and (2) the piezoelectric moduli are measures of the conversion efficiency from an electrical signal to a mechanical strain in the material and vice versa.

Figure 2 shows a cross sectional view of a PVDF circular membrane deflected under a differential pressure (P) to form a focused transducer as shown in Figure 1. If the ultrasound is emitted normal to the surface of the membrane, the focal point of the transducer will be located at

$$r = \frac{a^2 + w^2}{2w} \quad (3)$$

where,

$r \equiv$ membrane transducer focal radius
 $a \equiv$ membrane radius
 $w \equiv$ membrane deflection.

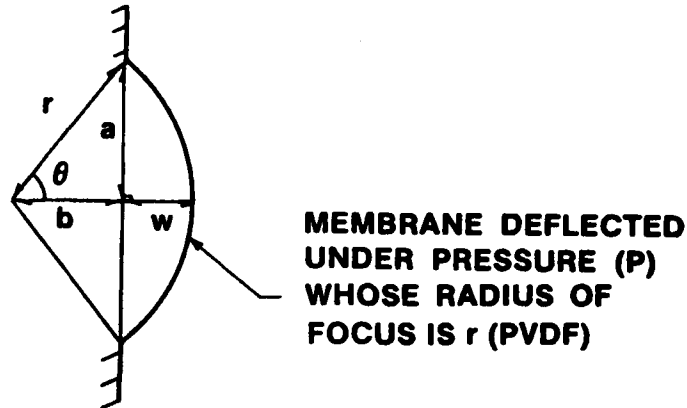

$r \equiv$ MEMBRANE FOCAL RADIUS
 $a \equiv$ MEMBRANE RADIUS
 $w \equiv$ MEMBRANE DEFLECTION

Figure 2. Circular membrane of radius (a) deflected under a differential pressure (P).

Equation 3 assumes a spherical shaped membrane deflection.

For the membrane under uniform pressure load P, the Hencky deflection equation is [4].

$$w = .662 a \sqrt[3]{\frac{Pa}{Et}} \quad (4)$$

where:

$w \equiv$ membrane deflection under differential pressure load
 $a \equiv$ membrane radius
 $t \equiv$ membrane thickness
 $P \equiv$ differential membrane pressure
 $E \equiv$ membrane modulus of elasticity

These equations assume the absence of a radial tensile force under no differential pressure load. Equations 3 and 4 were used to predict the focal length of .25 inch, .50 inch and .75 inch diameter PVDF transducers under a differential membrane pressure of 0 to 120 cm H₂O. The modulus of elasticity used in the computations was 8.438×10^6 cm H₂O. Figure 3 illustrates the results.

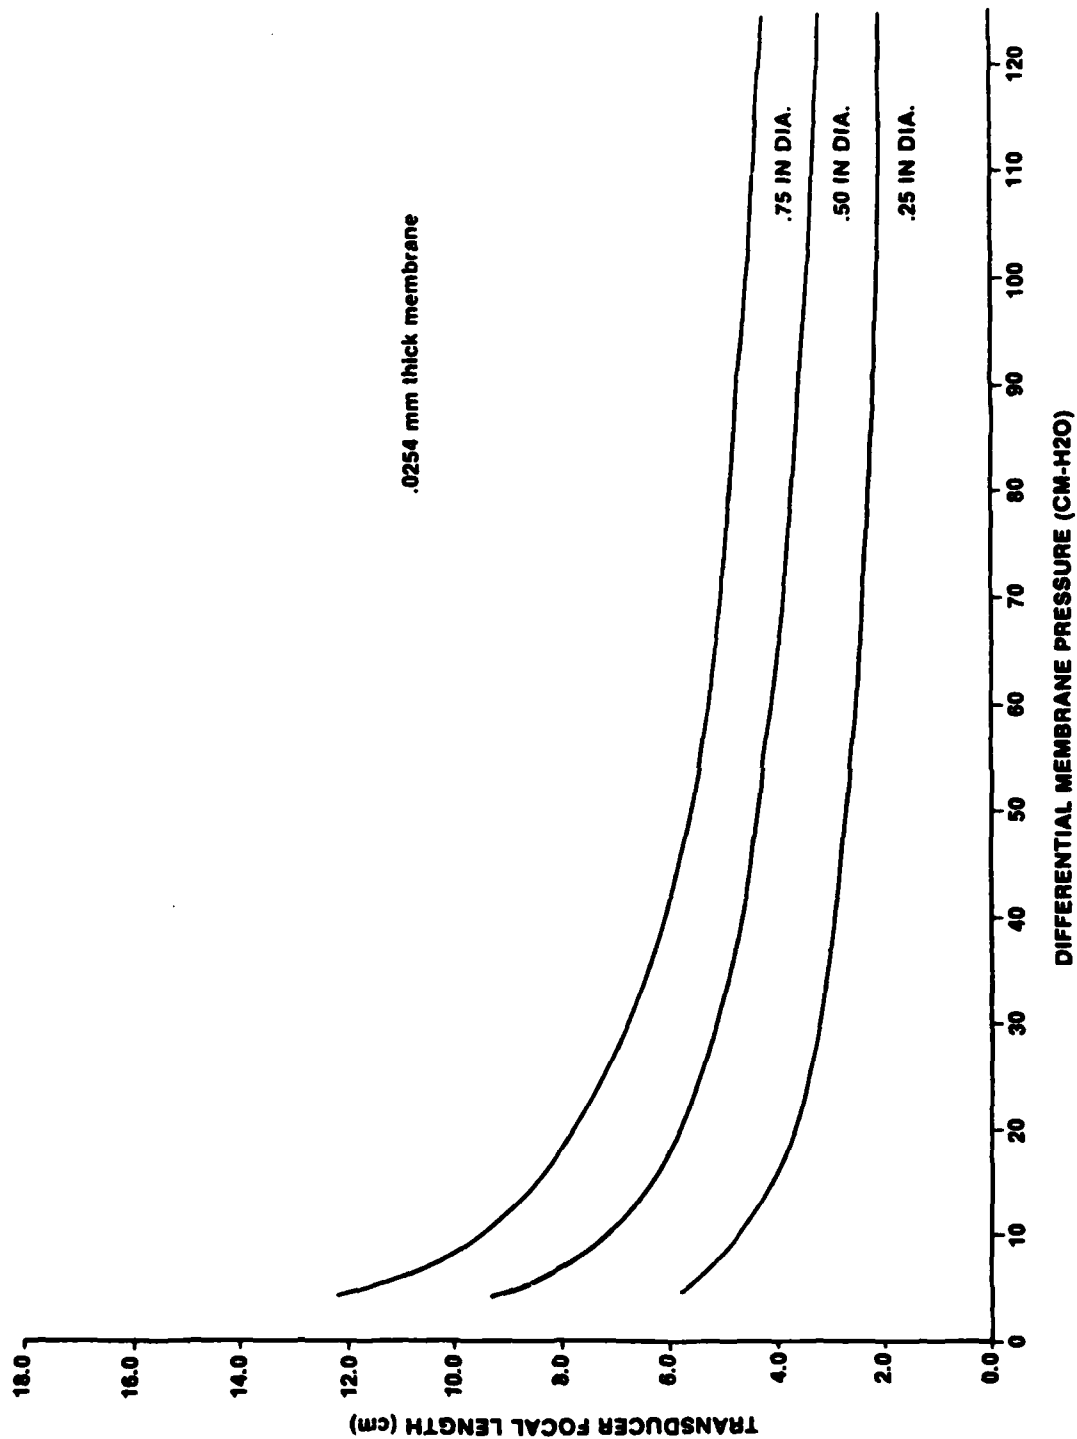


Figure 3. Transducer focal length versus differential membrane pressure.

If the transducer is operated as a diverging acoustic radiator, the angle of divergence θ will be given as

$$\theta = \text{Arcsin} \left[\frac{2wa}{a^2 + w^2} \right] \quad (5)$$

Equations 3 and 5 assume normal transmission from the surface of the membrane into the external acoustical medium which is not exactly true. For instance, a plane circular surface radiator of ultrasound will have a beam divergence given as [5],

$$\gamma = 68.8 \lambda/D \quad (6)$$

where

$\gamma \equiv$ angle of divergence in degrees

$\lambda \equiv$ ultrasonic wave length

$D \equiv$ diameter of circular radiator.

Equation 6 assumes small λ/D .

Another important parameter is the length of the near field [5]. For circular flat radiators of ultrasound

$$N = \frac{(D^2 - \lambda^2)}{4\lambda} \quad (7)$$

where,

$D \equiv$ diameter of ultrasonic radiator

$\lambda \equiv$ wavelength of ultrasonic wave

$N \equiv$ nearfield length

Figure 4 illustrates the variation of N with frequency for a 1500 m/sec wave velocity in water and a .5 inch diameter transducer. For uniform test results all calibration tests should be performed at ranges greater than N .

The basic concept for the PVDF array is illustrated in Figure 5. A membrane of KYNAR® PVDF piezoelectric film (obtained from the Pennwalt Corporation) had electrode material of nickel-chrome deposited on both sides of a film which measured 127 mm x 127 mm x 27 μ m thick. Portions of both sides of the membrane were selectively etched in acid to leave four electrode strips (on each side). When an RF signal is applied to a front and rear electrode, where these electrodes cross-over, the E-field becomes intense. This action activates the PVDF material in the cross-over region and a transducer is formed. Figure 5 illustrates 16 such transducers on a single PVDF membrane. The next step is to place the membrane in a cavity similar to Figure 1 to generate ultrasound. In reality, sixteen individual cavities were used to contain ultrasound.


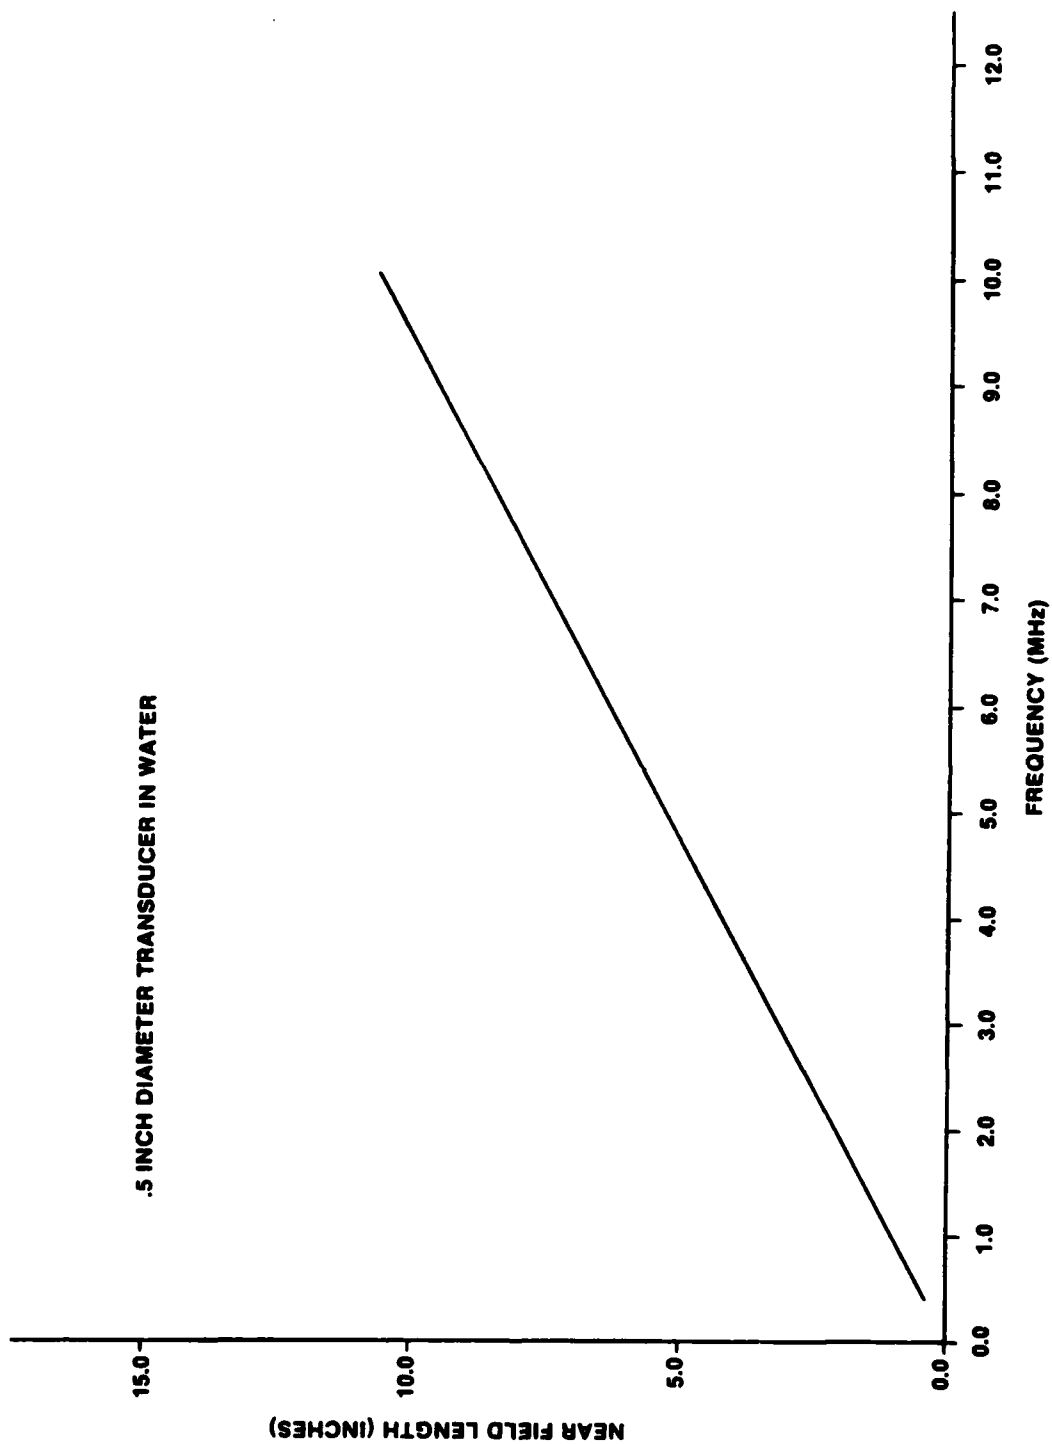


Figure 4. Near field length versus frequency for a .5 inch diameter transducer in water.

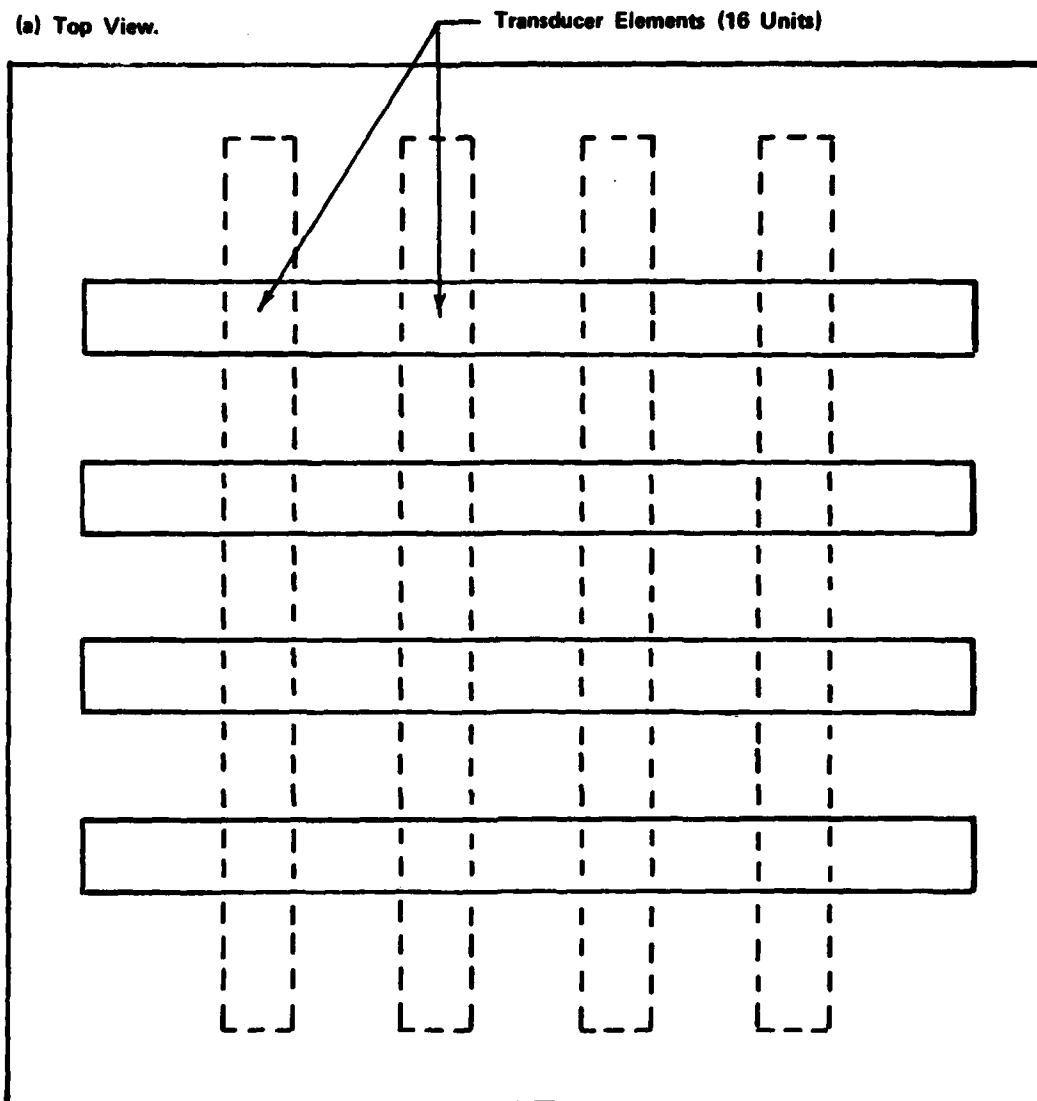

(b) Side View.

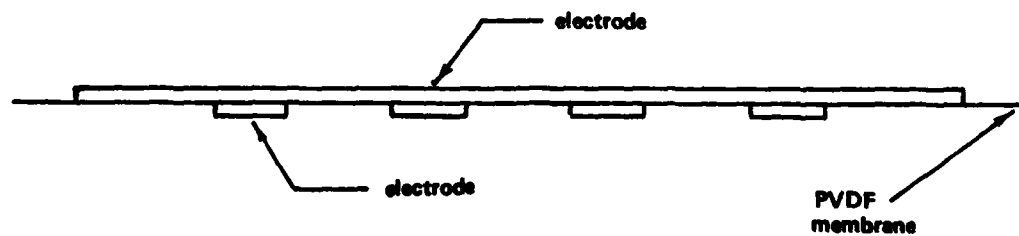


Figure 5. Schematic of PVDF Membrane.

III. ARRAY FABRICATION AND TESTING

In order to hold the PVDF membrane and obtain suitable electrode contacts, front and rear electrode holders were constructed as in Figure 6. The membrane was sandwiched between these holders. A gas supply chamber for supplying gas pressure to deflect the membrane was attached to the rear electrode holder. This chamber is illustrated in Figure 7.

Etching of the membrane was performed according to the following procedure:


1. Paint all regions not to be etched with a moderately thick coat of Pacific 8010-00-584-3150 Lacquer, Nitrocellulose, Type I, TT-L-50G and Amend III, Flat White, No. 37875 paint. Contract GS-10S-40992, flash point -56.6°C (-70°F).
2. Etch the unpainted Ni-Cr metal with a 25 percent solution of 38.6 percent concentrated HCl.
3. Rinse membrane in H_2O to remove residual HCl.
4. Soak membrane in Hexane for 30 seconds and peel away the paint from the unetched Ni-Cr PVDF membrane material.

The mask used in the etching procedure is illustrated in Figures 8 and 9.

Following the etching process, discontinuities in the Nickel-Chrome electrodes were removed by applying ten thin coats of powdered silver in Amyl Acetate over each electrode. Assembly of the transducer was performed by punching all the necessary assembly holes (16 in all) into the membrane. Flat-head counter-sunk screws for electrode contacts were then placed in the electrode holders and covered with liquid solder for good electrical contact. The membrane was sandwiched into the holders and the gas supply assembly was bolted to the transducer as a complete packaged unit. Figures 10 through 12 illustrate the transducer assembled and mounted in a holder frame.

The control electronics for the transducer were designed and fabricated by Sperry Support Services in Huntsville, Alabama under contract to the government. Figures 13 and 14 illustrate the system with the transducer attached. The RF switch system block diagram is illustrated in Figure 15 for the control electronics. The system features a Wavetek, Model 143 signal generator for generating RF signals (either continuous or pulsed). The signals are amplified by an ENI Model A150 signal RF amplifier and selectively switched to the array by a selector switch assembly shown in Figure 16. Figure 17 illustrates the array connected to the electronics.

Table 1 contains a summary of the electronics functions. The system is capable of generating continuous or pulsed RF signals. In the pulsed RF mode, 0.1-50 μs pulses with a 1 to 10,000 Hz repetition rate trigger the RF wave burst mode of the Wavetek RF generator which can generate either 1-20 MHz continuous or pulsed RF signals. The selector switch assembly can be used to apply the RF signal to all, one, any combination of row or any combination of column transducers. The method in which the signal can be applied to the transducer assembly is illustrated in Table 1.

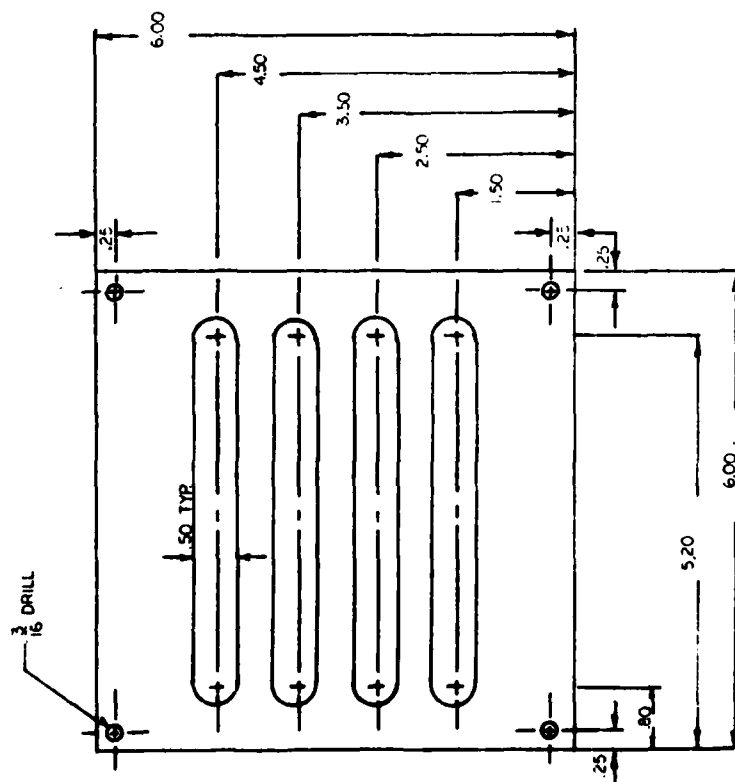

NOTES

1. .064 FINISH
2. ONE REQ'D

U.S. ARMY MISSILE COMMAND REDSTONE ARSENAL, ALABAMA		PVDF MASK	
DATE 6 June 58		SIZE CODE IDENT NO DRAWING NO.	
PREPARED J.P.A.	CHECKED J.P.A.	C18876	SK-NDT-050
ENGINEER J.L.	APPROVED BY ORDER OF G1.	SCALE 1/1	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS 1/16, 1/8, 1/4, 3/8, 1/2, 5/8, 3/4, 7/8 DECIMALS .01		SHEET 1 OF 2	
MATERIAL STEEL .0625 THK			
NETT ASSY	USED ON		
APPLICATION			

Figure 8. Front Mask for Etching the PVDF Membrane.

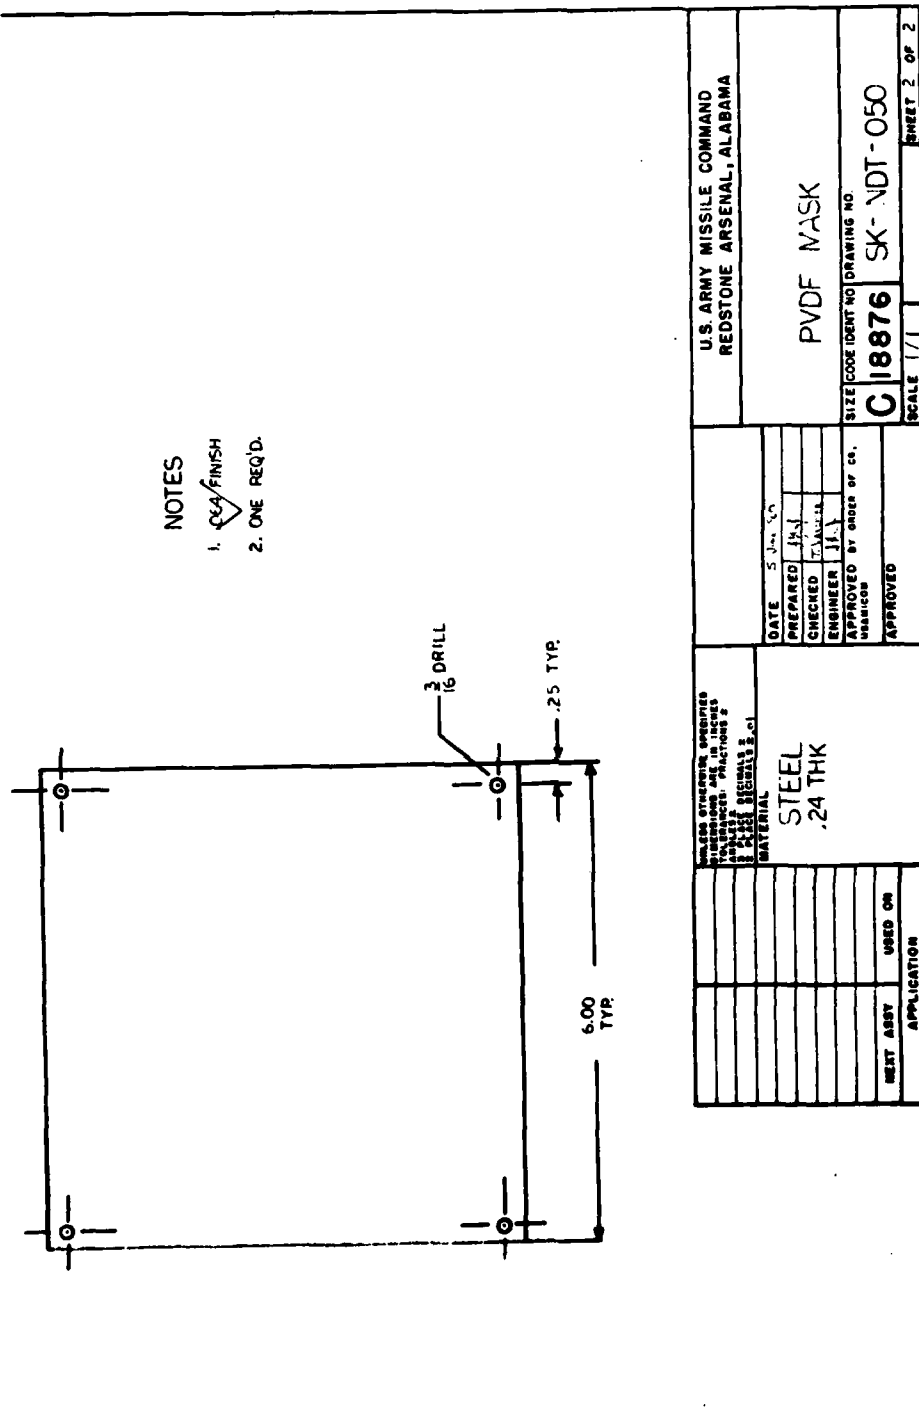


Figure 9. Back Pressure Plate for the Etching Mask.

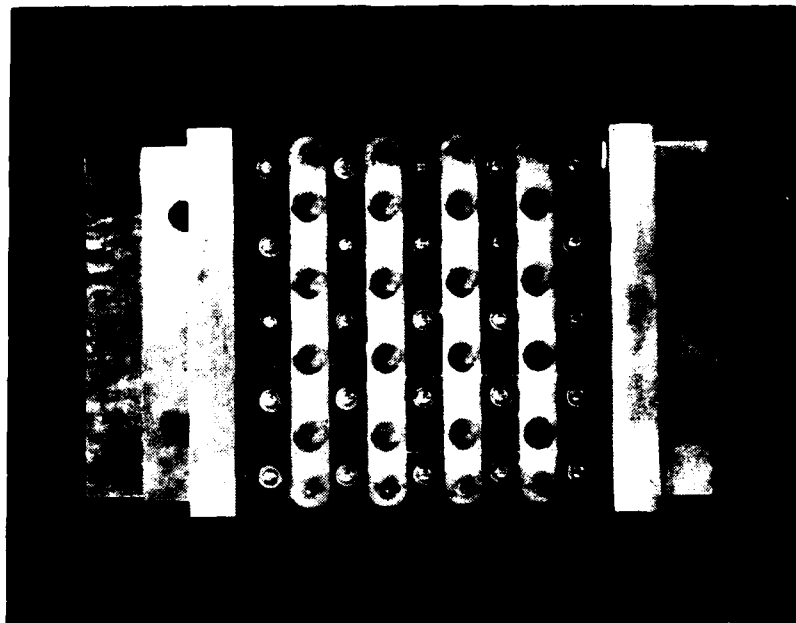


Figure 10. Top view of the assembled PVDF array transducer.

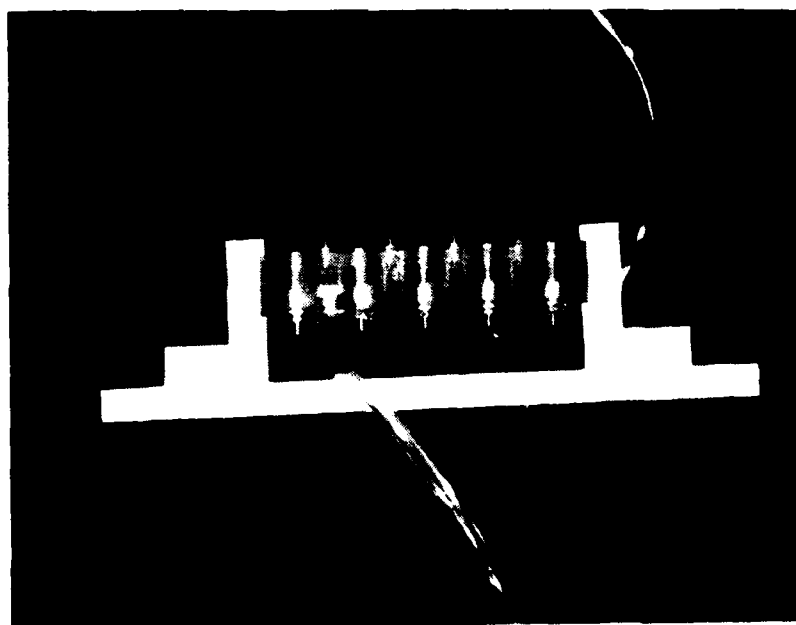


Figure 11. Gas fittings for the PVDF array transducer.

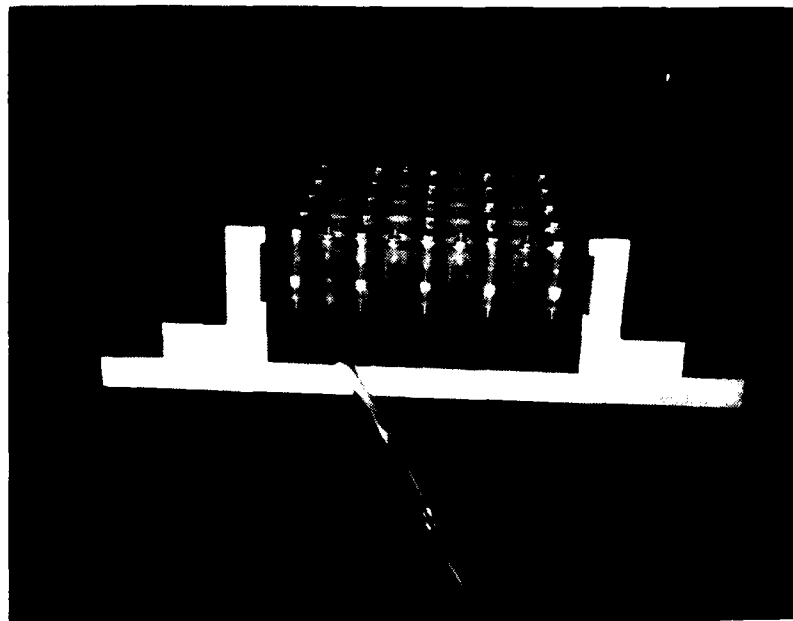


Figure 12. Assembled PVDF array transducer.

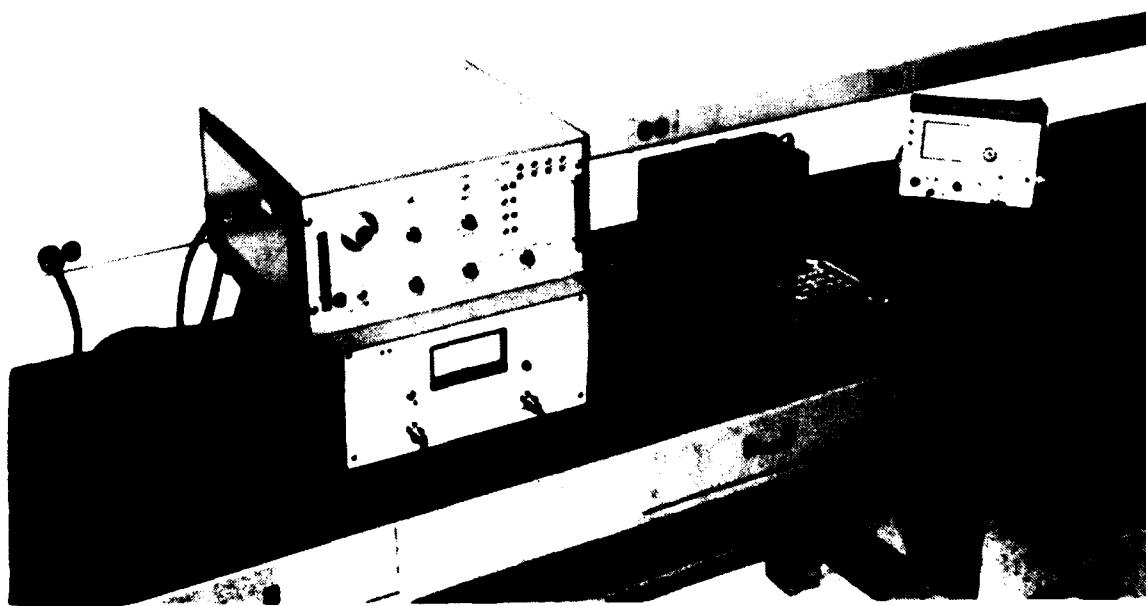


Figure 13. System control electronics.

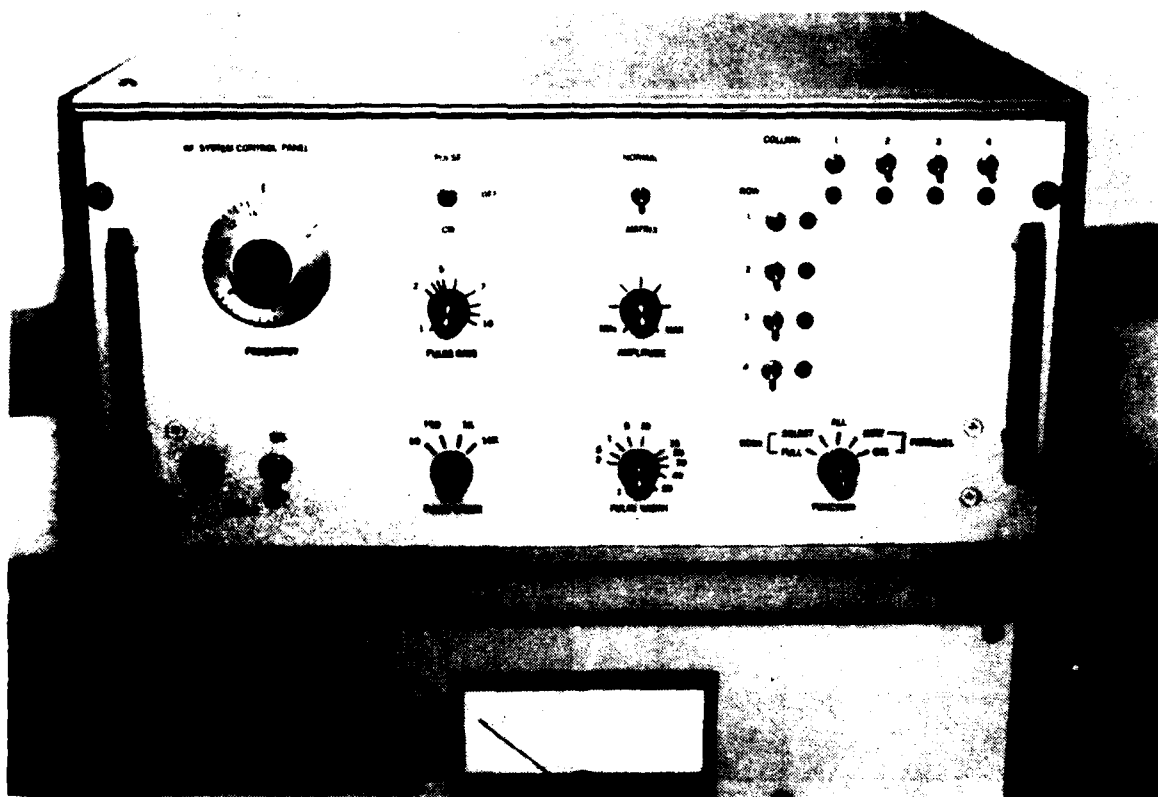


Figure 14. Transducer electronics control panel.

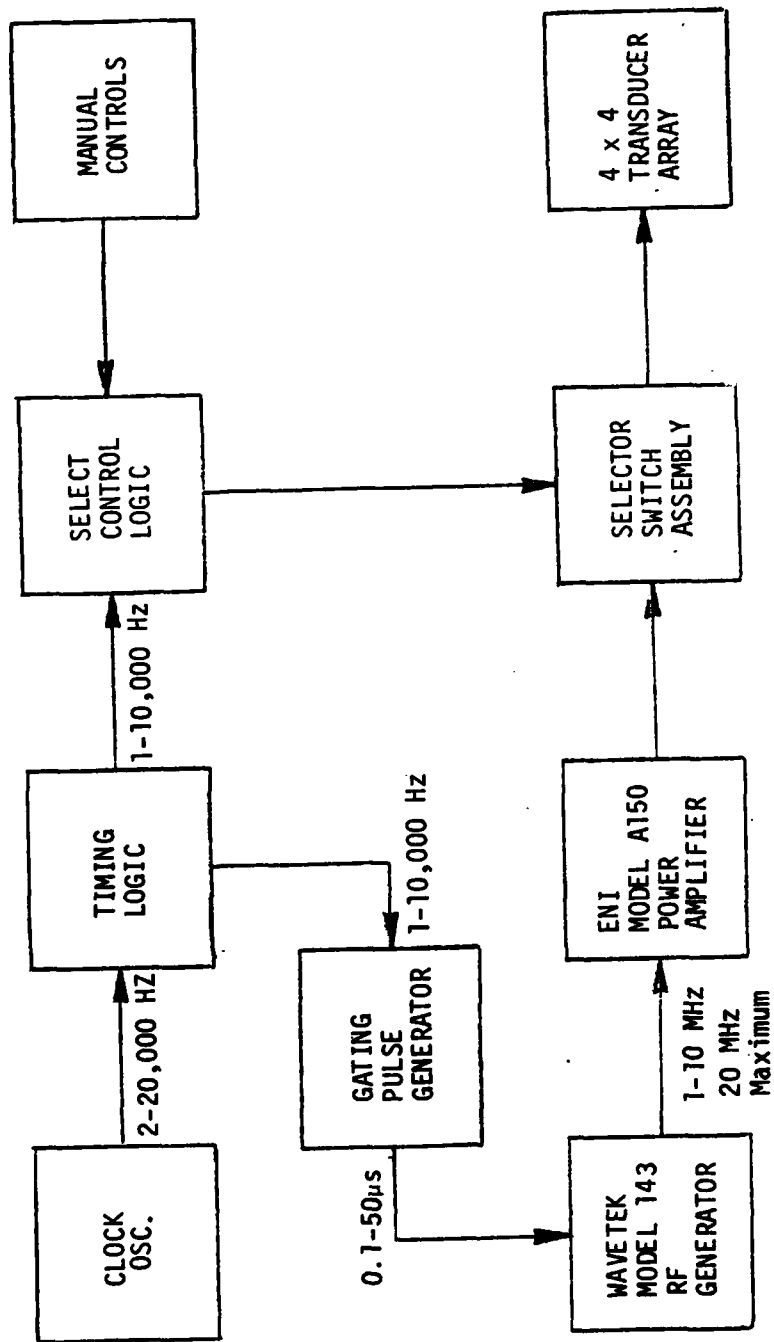


Figure 15. RF Switch System Block Diagram.

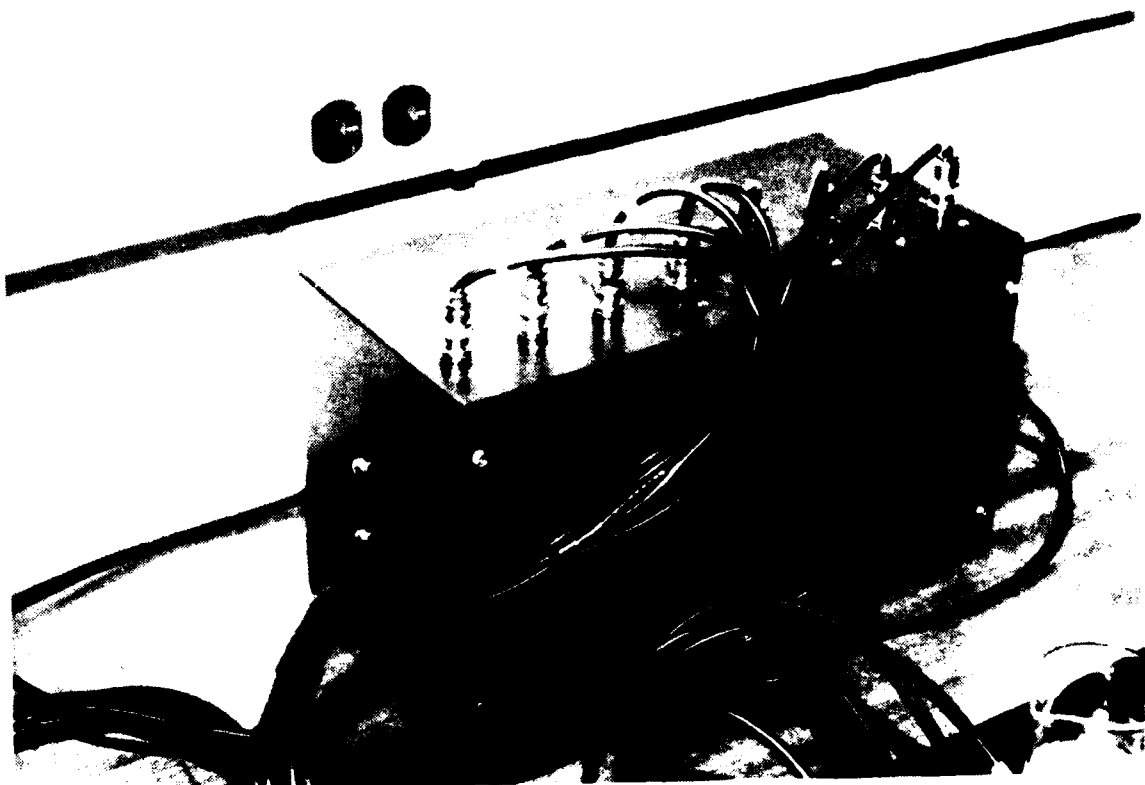


Figure 16. Selector switch assembly.

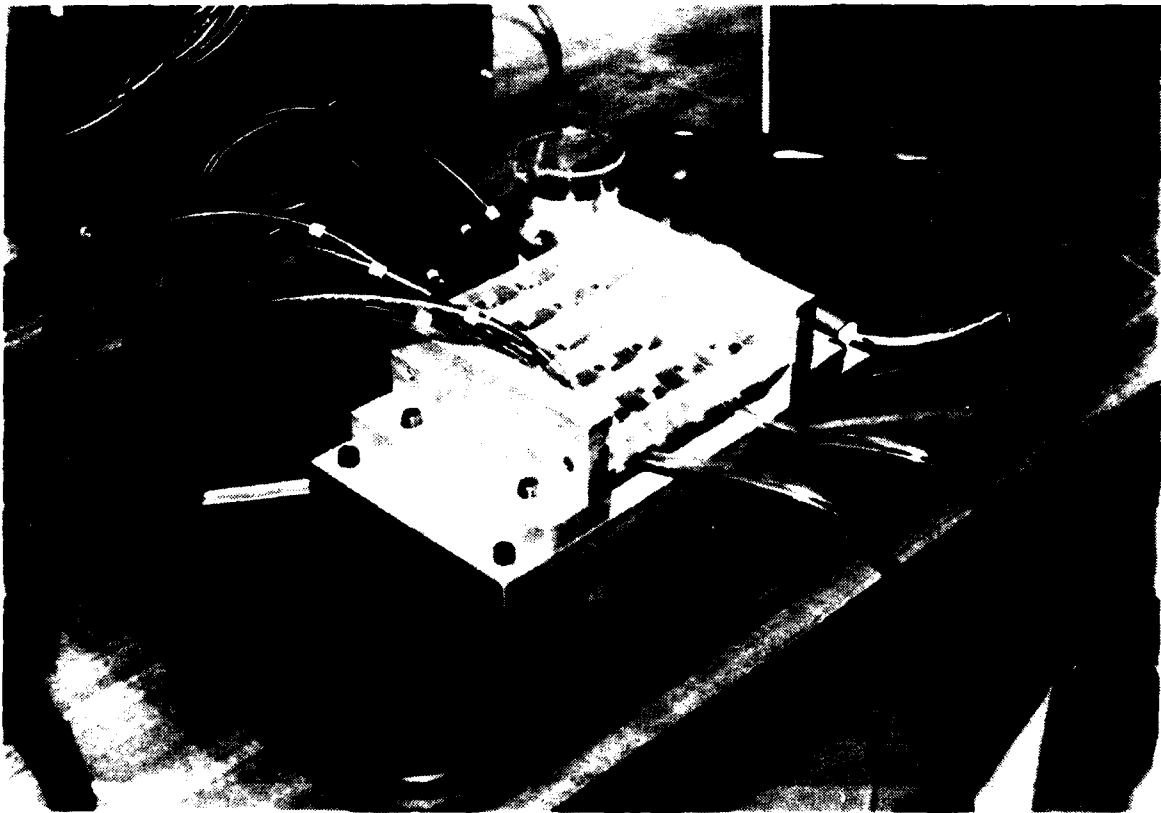


Figure 17. Array transducer connected to the electronics system.

Table 1. System electronic control functions

<u>FUNCTIONS</u>	<u>NORMAL</u>	<u>MATRIX</u>
FULL SCAN	Sequences through all of the rows and columns - one at a time	Sequences through all 15 crosspoints in order - one at a time
SELECT SCAN	Sequences through any rows and columns that are selected	Sequences through any of the crosspoints that are selected
ALL	All rows are excited and all columns are grounded	All columns are excited and all rows are grounded
ROW PARALLEL	Selected rows are excited and all columns are grounded	Selected columns are excited and selected rows are grounded
COLUMN PARALLEL	Selected columns are excited and rows are grounded	Selected columns are excited and selected rows are grounded

To test the transducer in the laboratory, the gas system was attached as illustrated in Figure 18 and shown in Figure 19. A gas pressure regulator (Matheson 40-L) supplied pressure to one port of the array transducer. The differential pressure acting on the membrane was monitored through the other array gas pressure port using a mercury manometer. Fine control of the gas pressure was performed using a micrometer air-bleed valve.

Preliminary tests have been conducted on the transducer to better understand its operation. In the tests, the transducer was mounted face-up as shown in Figure 17. A .4375 in. dia. acoustical receiver transducer was connected to an oscilloscope. In each transducer, water was placed as an acoustical couplant material between the membrane and receiver transducer. All transducers were found satisfactory for operation. In row 1, the column 2 transducer had about 20 percent of its silver paint flaked off due to membrane crimping during assembly. The column 4 transducer had a scratch on the paint. The row 2, column 2 transducer suffered about a five percent paint loss. In all the tests 2.8 cm Hg differential membrane gas pressure was used.

In test procedure-1 a continuous wave 20 MHz signal at 30 percent Amplitude was applied to all of the transducers. When the receiver transducer was placed over each transducer, a signal from 90 to 110 mv peak-to-peak could be received. The orientation of the receiver was very important. This test established initial uniformity of the transducer output signal. Table 2 indicates the results of the test. In test procedure-2, the frequency was lowered to 15.2 MHz and readings were again taken. The uniformity of the signal output is indicated in Table 3. In test procedure-3, the test was the same as in previous experiments except that all the transducers in row-1 were activated in the pulse mode. Although the row-1 transducers generated more output power overall, there was still a great deal of signal being generated from the other units. This RF coupling problem needs further investigation. Even when a single transducer was activated, significant RF bleed-over was encountered. To test whether or not this was RF coupling between the source electrode and the transducer, the parameters of test procedure-2 were repeated. In the first step, transducer 3-3 [row-3, column-3] was read at 128 mv peak-to-peak. When a .0045 inch thick piece of foil was placed in front of the receiver 12 mv peak-to-peak was read. Finally, the signal electrode output was placed on the foil and no change was observed in the transducer output. This indicates that RF antenna coupling to the receiver transducers may not be the problem. The major problem in using a transducer as a single element is its own internal capacitance. The high capacitance of the dielectric PVDF material results in significant internal coupling. Even when a signal and ground electrode on a transducer have been connected, output from the shorted transducer has been observed.

The final test of the array was to set up the system shown in Figure 20. Spatially filtered argon laser light is collimated on to the water covered surface of the array and collected onto a viewing screen. An aperture is placed at the focal point of the lense for higher-order filtering of the reflected light from the water surface. When a transducer element is activated, levitation of the water surface occurs resulting in a diffracted image on the viewing screen. When maximum continuous wave power was applied to all transducer elements simultaneously with an 8.4 cm Hg vacuum and 1.0 inch of water covering the array, the following was observed:

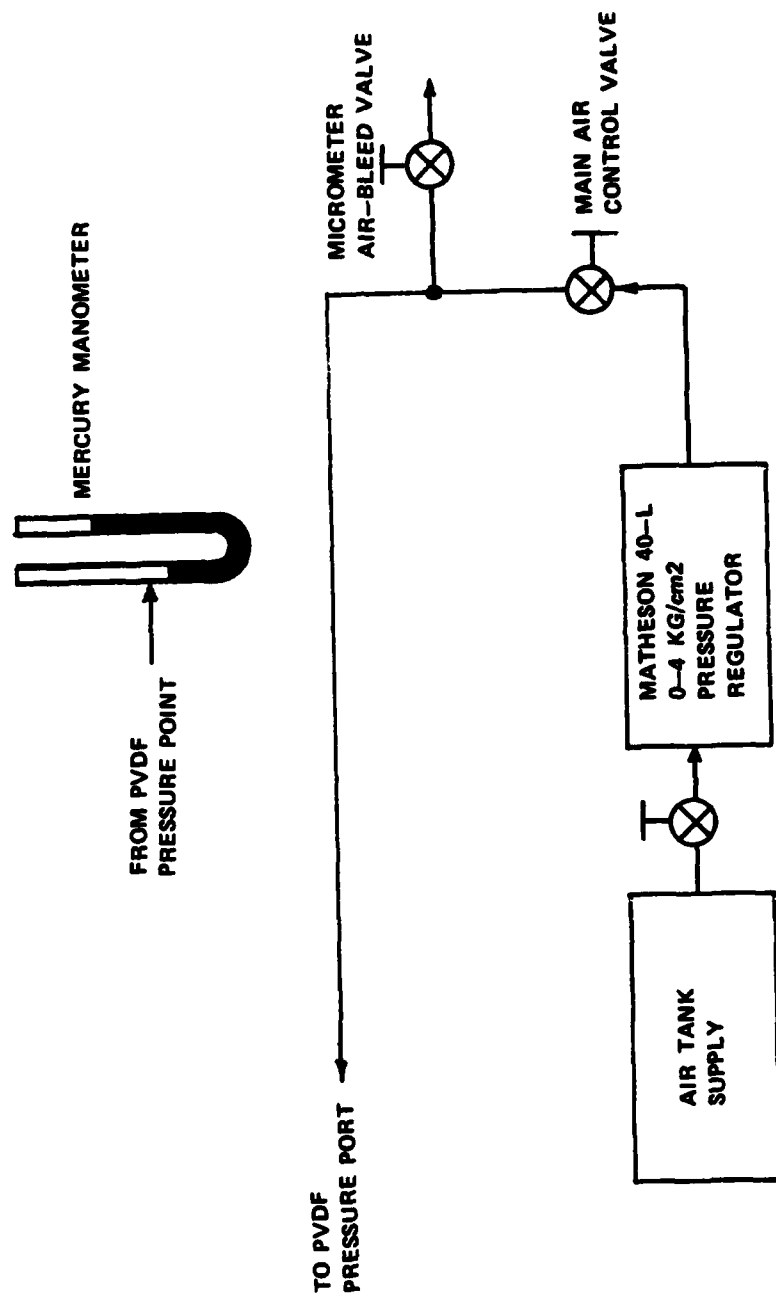


Figure 18. Mechanical Block Schematic of PVDF Transducer Gas Supply System.

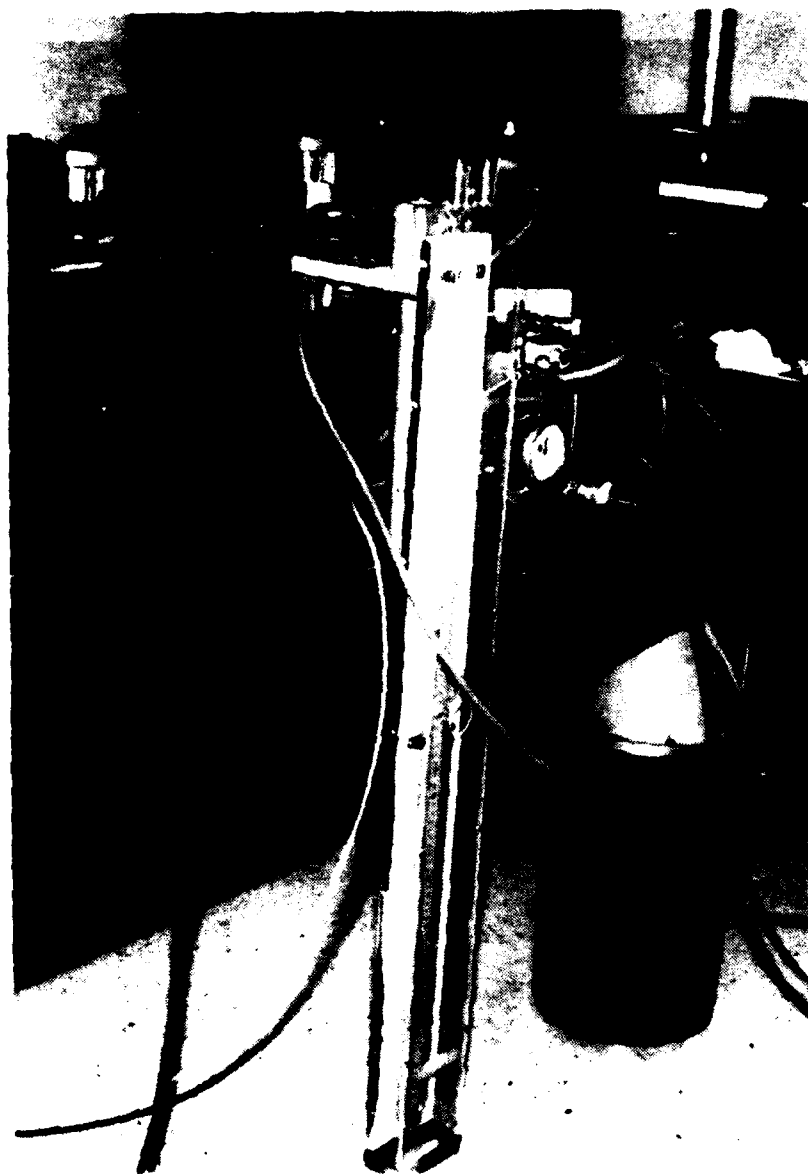


Figure 19. PVDF Transducer Gas Supply System.

Procedure - 1

Test Parameters:

Δ^P membrane = 2.8 cm Hg
20 MHz Operating Frequency
CW Mode
Transmit - ALL
10,000 pps
30% Amplitude
50 μ s pulse width

Table 2. Procedure-1 Receiver Voltages

		Column Electrodes			
		1	2	3	4
Row Electrodes	1	100 mv \pm 10%	100 mv \pm 10%	100 mv \pm 10%	100 mv \pm 10%
	2	100 mv \pm 10%	100 mv \pm 10%	100 mv \pm 10%	100 mv \pm 10%
	3	100 mv \pm 10%	100 mv \pm 10%	100 mv \pm 10%	100 mv \pm 10%
	4	100 mv \pm 10%	100 mv \pm 10%	100 mv \pm 10%	100 mv \pm 10%

Signals are peak-to-peak voltages

Procedure - 2

Test Parameters:

Same as Procedure - 1 except that a 15.2 MHz Operating Frequency was used.

Table 3. Procedure-2 Receiver Voltages

		Column Electrodes			
		1	2	3	4
Row Electrodes	1	140 mv	146 mv	146 mv	146 mv
	2	148 mv	146 mv	140 mv	144 mv
	3	150 mv	146 mv	146 mv	144 mv
	4	150 mv	160 mv	144 mv	144 mv

Signals are peak-to-peak voltages

Procedure - 3

Test Parameters:

Same as Procedure - 2 except that the Row Mode and Pulse Mode were activated. Row-1 was activated.

Table 4. Procedure-3 Receiver Voltages

Column Electrodes				
	1	2	3	4
1	70 mv	70 mv	64 mv	64 mv
2	62 mv	62 mv	64 mv	66 mv
3	60 mv	62 mv	62 mv	62 mv
4	60 mv	62 mv	64 mv	64 mv

Signals are peak-to-peak voltages

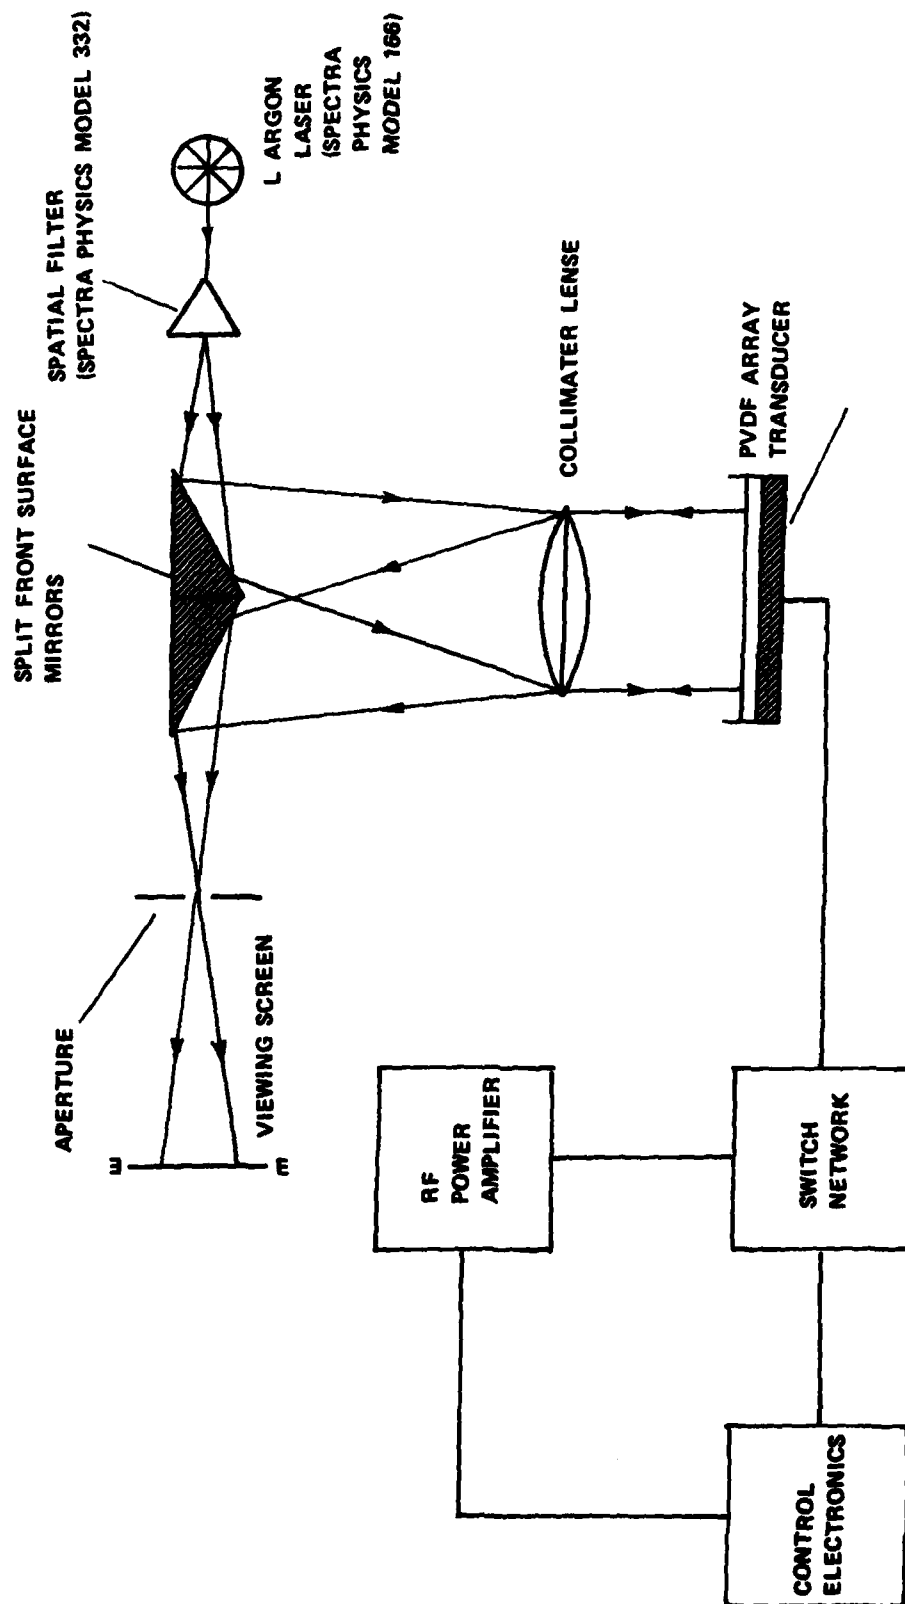


Figure 20. Real-time Array Performance Viewing System.

- (1) A .500 MHz to 13.500 MHz Response Frequency was observed.
- (2) The maximum response occurred at 13.500 MHz.
- (3) Transducer performance was improved with the applied vacuum.

When a single transducer was activated, RF cross-over to the other transducers was observed only at the higher frequencies. The transducer was not characterized by broad-band frequency response. The array tended to resonate at rather narrow select frequencies. In general, all the elements of the array responded in a similar manner. Also, transducers with crimped edges tended to perform much more poorly.

IV. CONCLUSIONS


The acoustical array transducer is relatively inexpensive to fabricate, has a good frequency response range and a variable focal length. Specific problems encountered with the present device include RF cross-over, low power output resulting in low efficiency and electrode problems. A suitable replacement needs to be found for the silver paint since it tends to dampen the generation of ultrasound and degrades with operating time and exposure to water. The present device shows promise for being integrated into large panels of transducers and possibly phased arrays. It shows potential for NDT and Experimental Mechanics Applications.

REFERENCES


- [1] Scheffel, J. A., "A Polyvinylidene Fluoride Differential Membrane Pressure Acoustical Transducer," U. S. Army Missile Command, Technical Report T-79-95, 28 September 1979.
- [2] Murayama, N., Nakamura, K., O Bara, H., Segawa, M., "The Strong Piezoelectricity In Polyvinylidene Fluoride (PVDF)," Ultrasonics, Vol. 14, No. 1, January 1976.
- [3] Pollard, H. F., "Sound Waves In Solids," Pion Limited, London, England, 1977.
- [4] Roark, R. J., "Formulas for Stress and Strain," 3rd Edition, McGraw Hill Book Co., N. Y., 1954.
- [5] Boyer, H. E., Editor, "Metals Handbook - Nondestructive Inspection and Quality Control," American Society of Metals, 8th Edition, Vol.11, 1976.


APPENDIX


This appendix contains drawings of the control electronics manufactured by Sperry Support Services to control the PVDF array transducer.

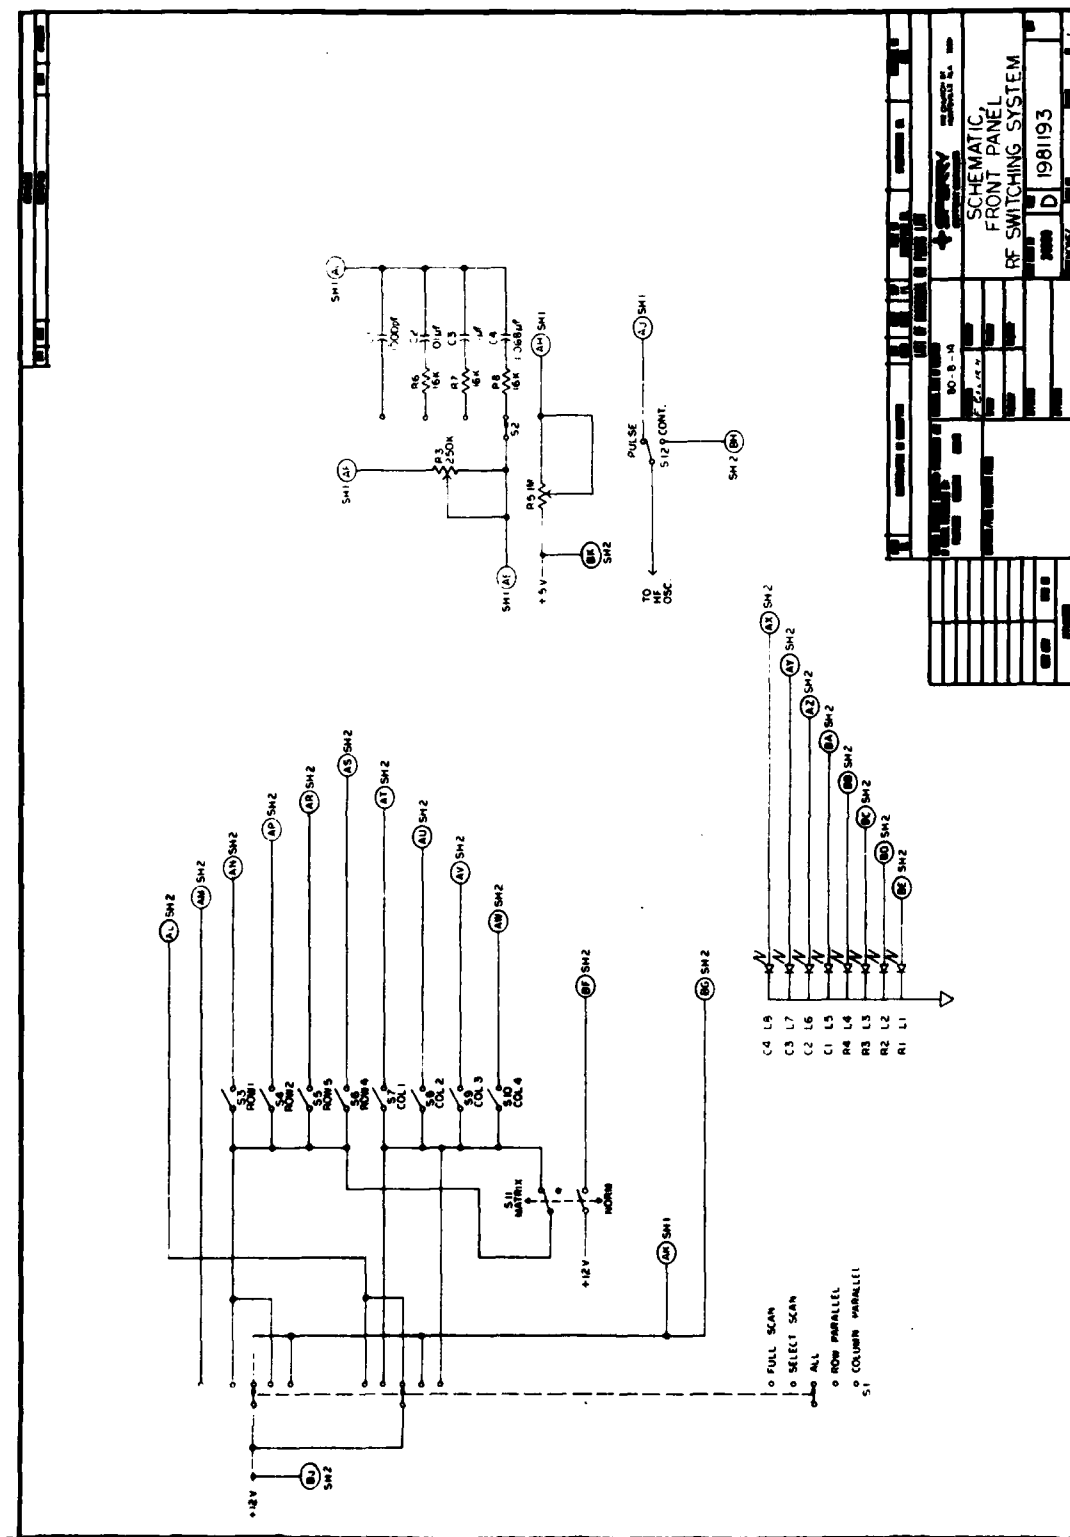


SCHEMATIC,
FRONT PANEL
RF SWITCHING SYSTEM
198193

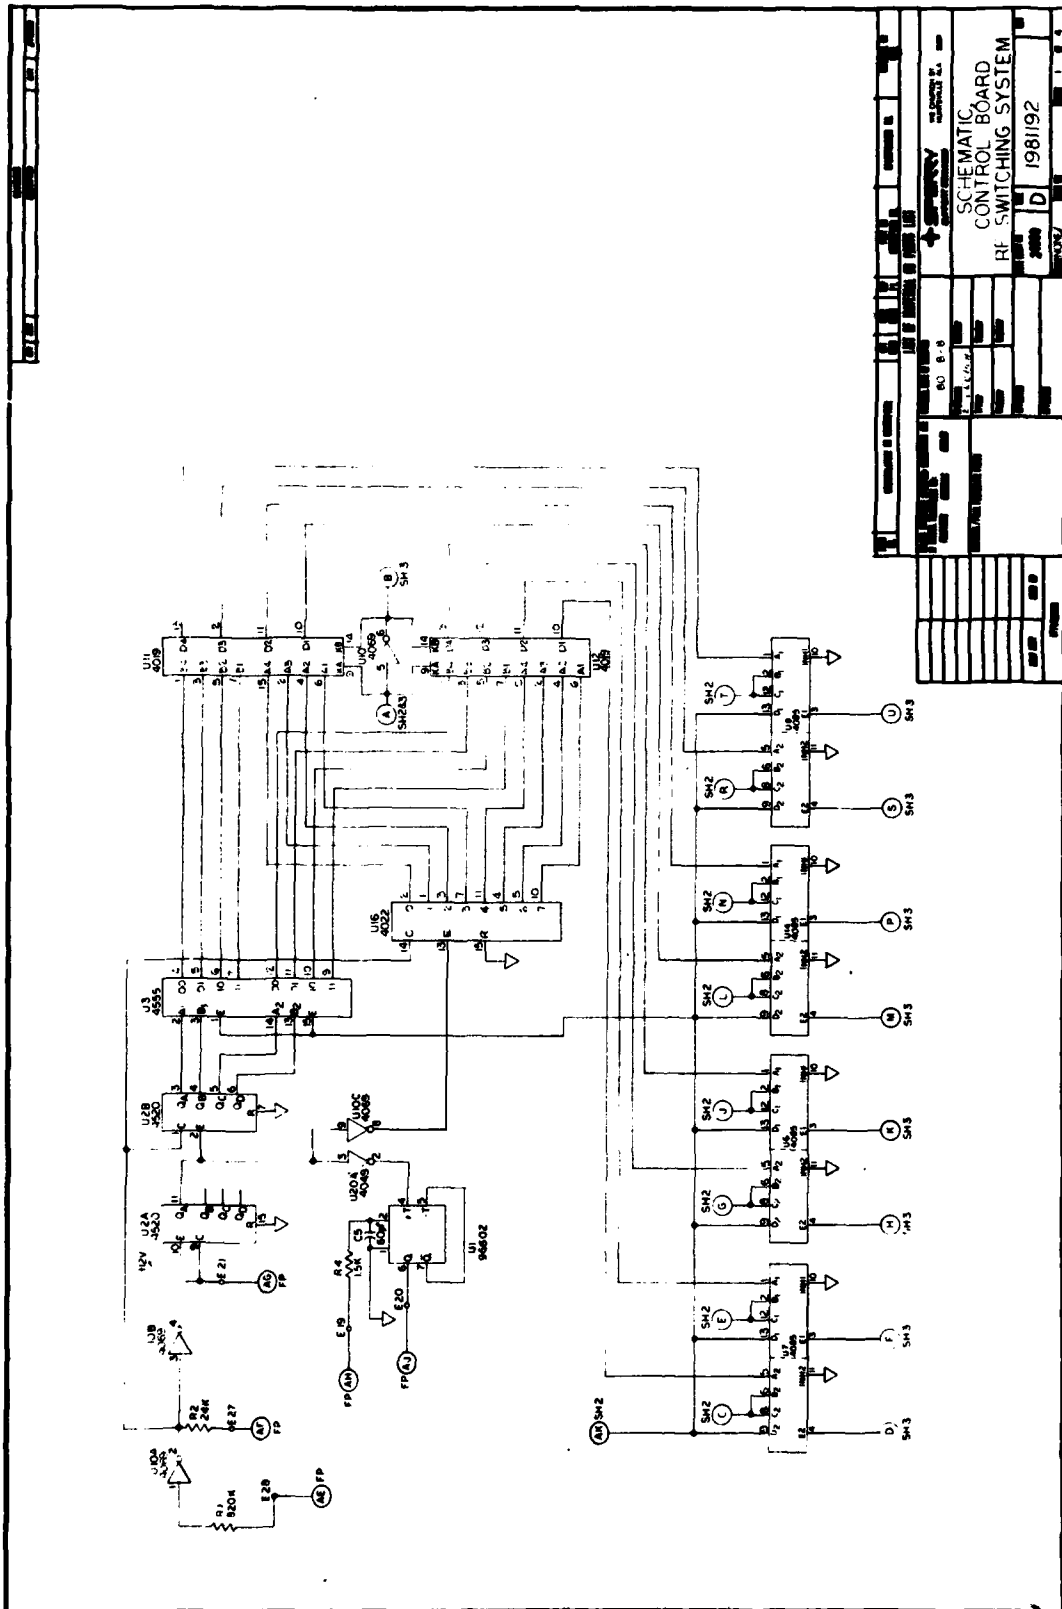

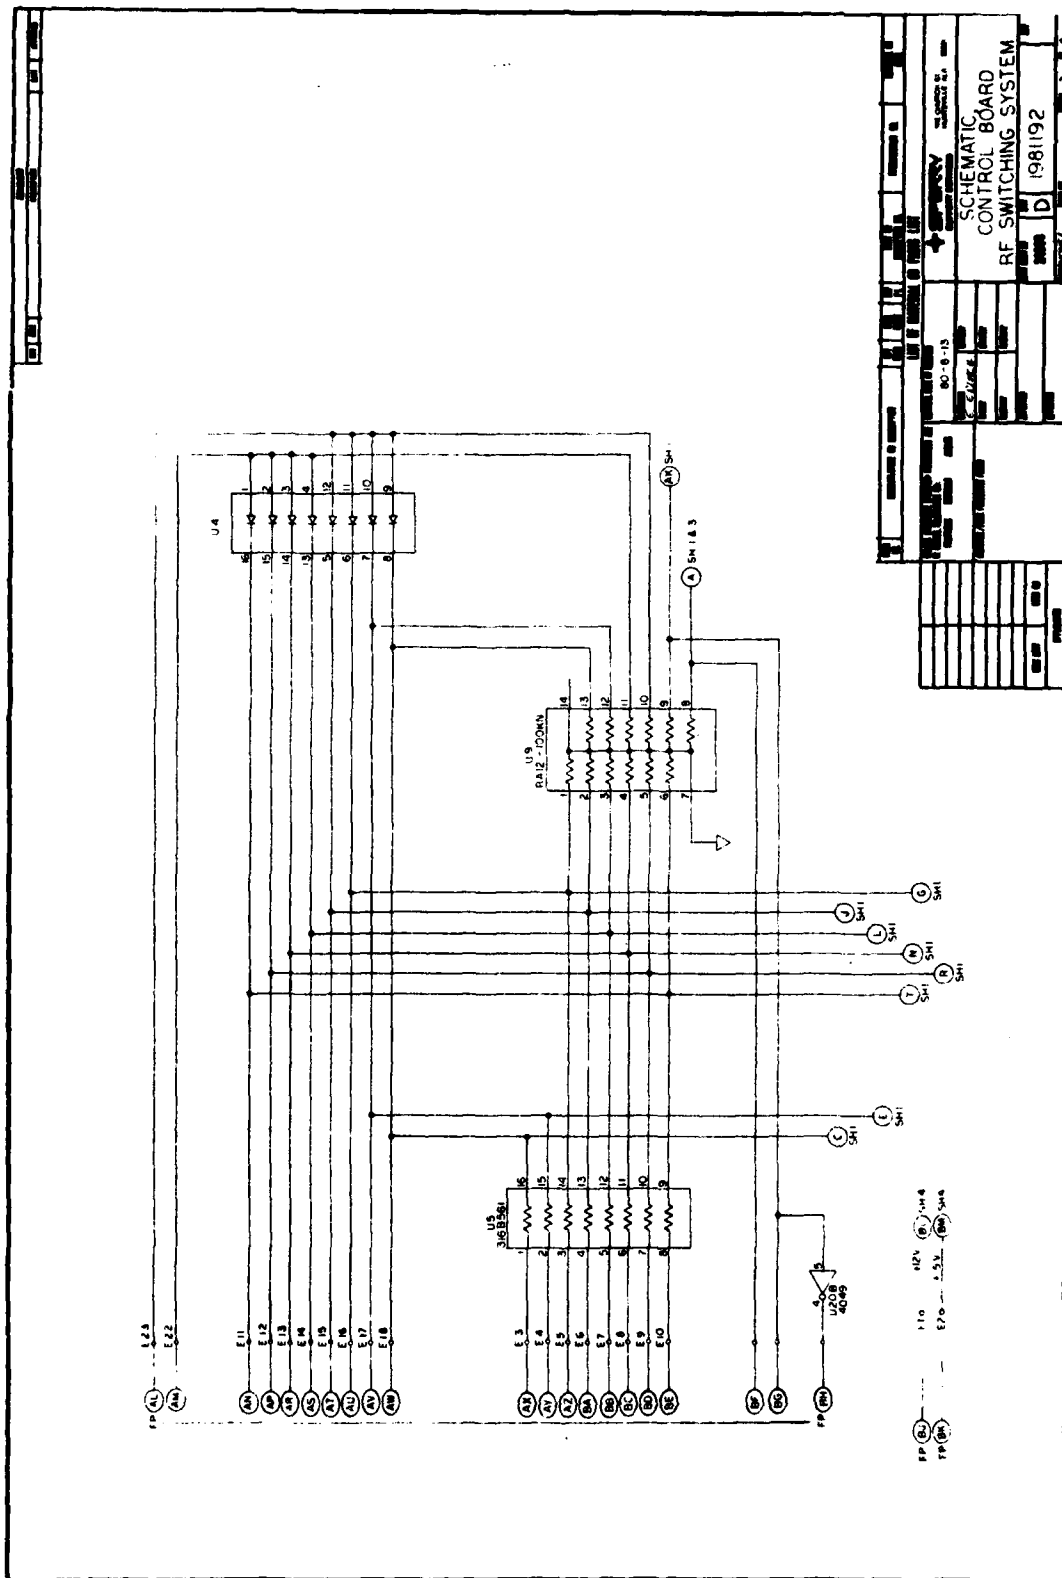

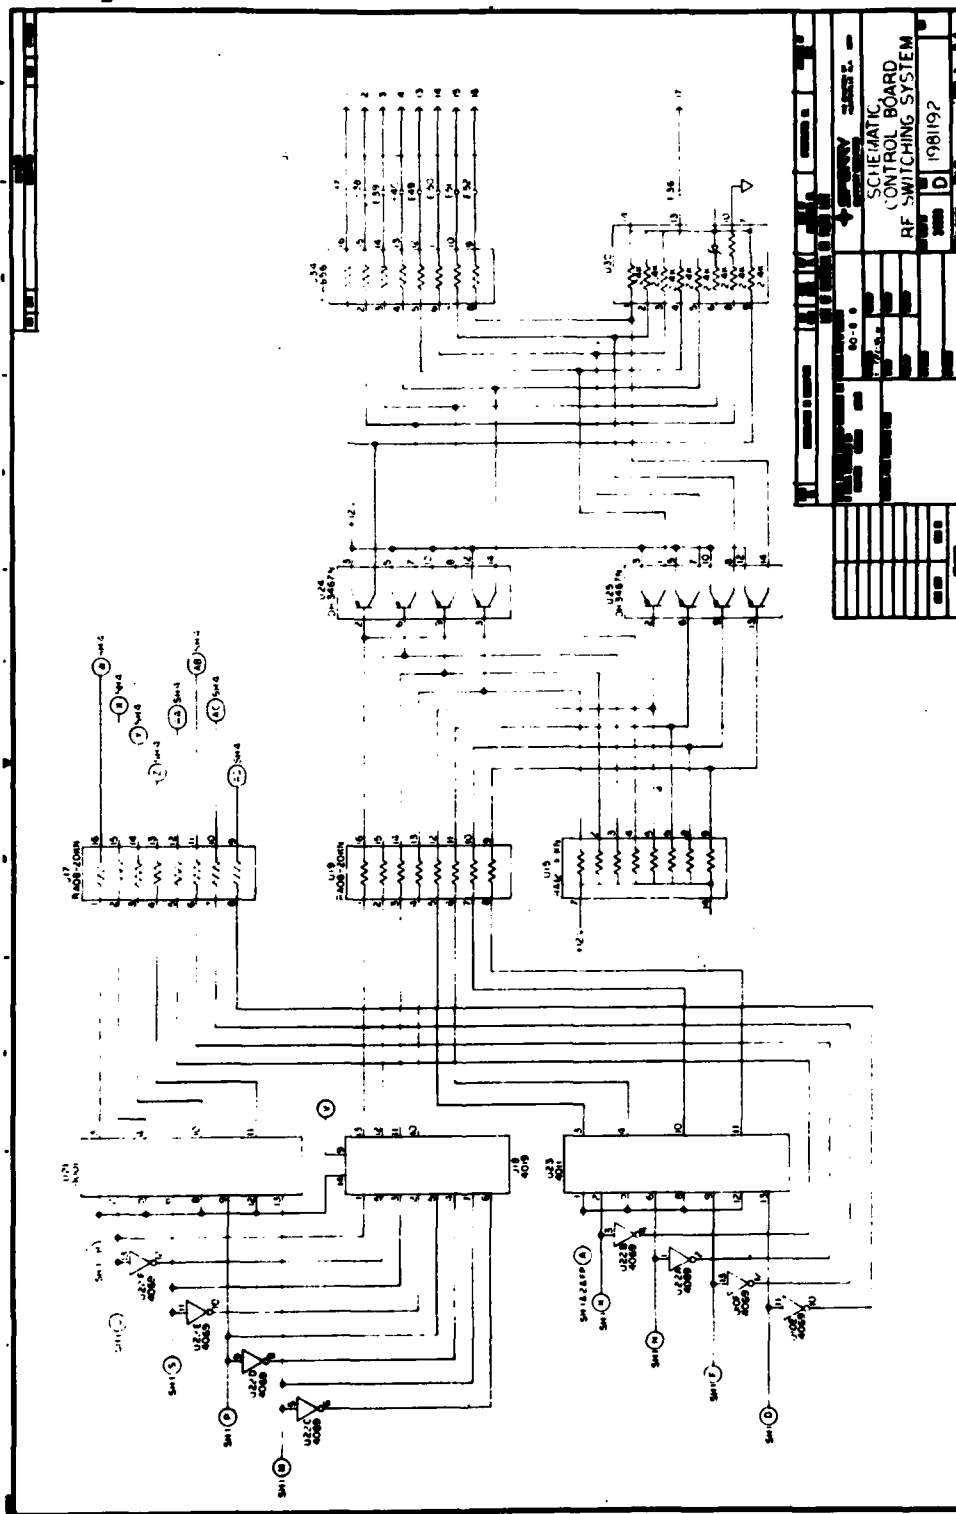

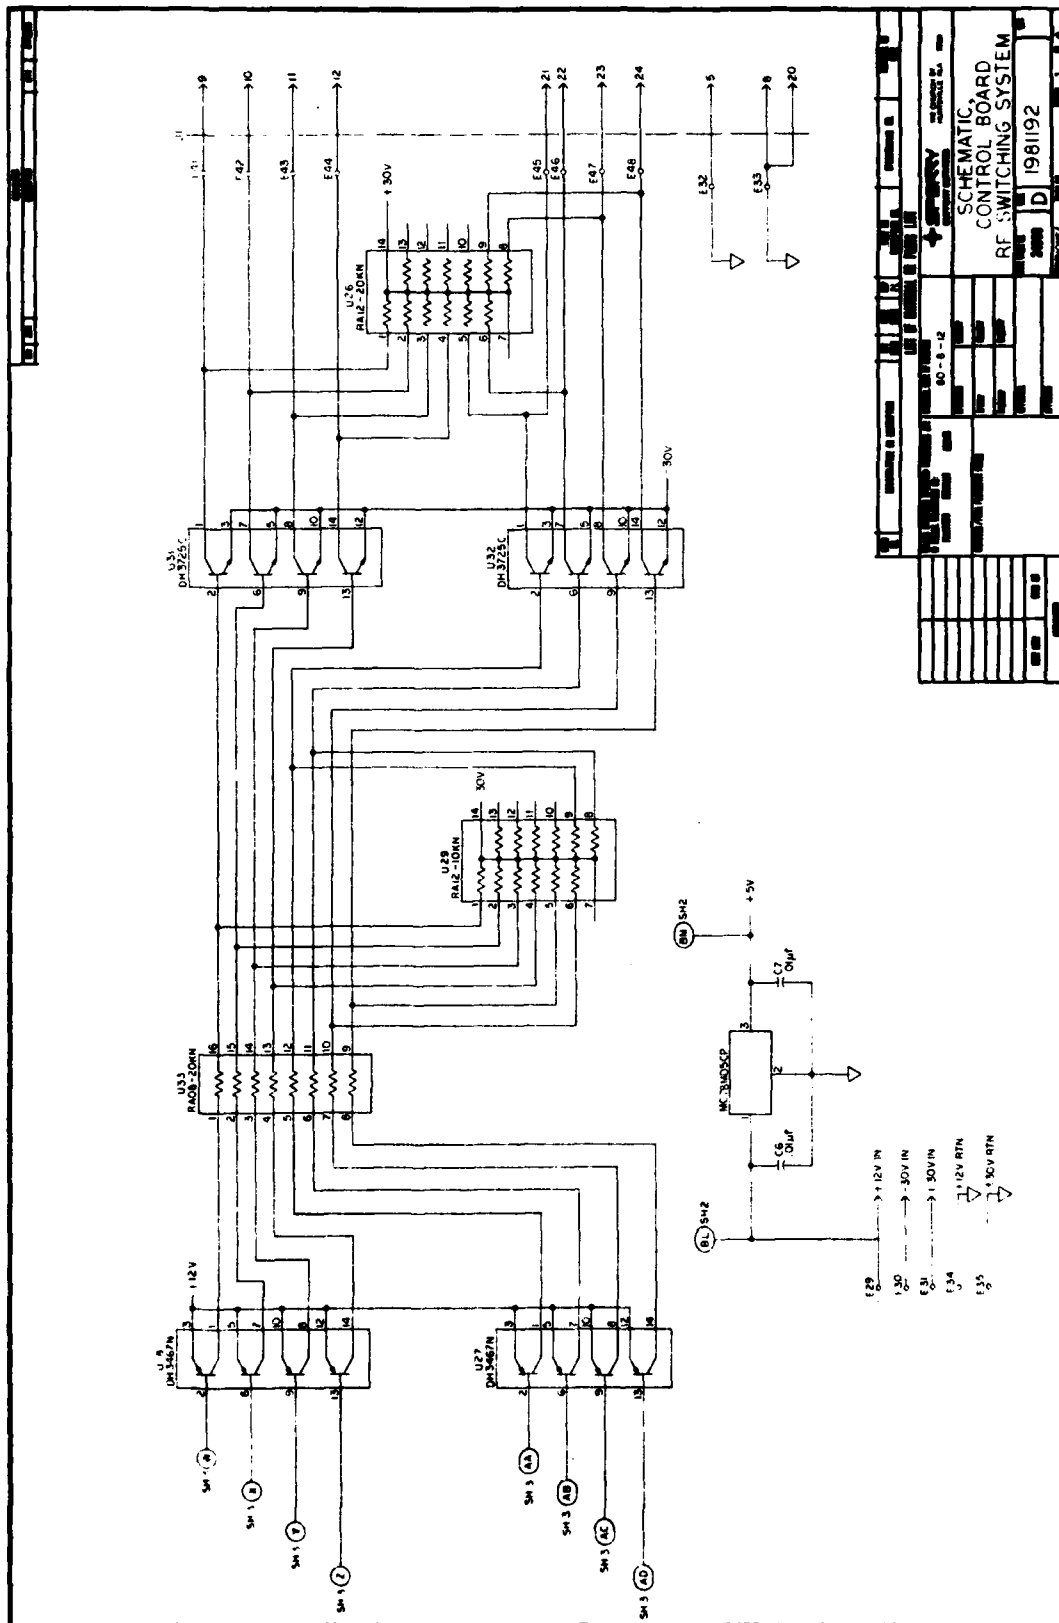

DISTRIBUTION

	<u>No. of Copies</u>
Director USA Mobility Equipment Research and Development Center Coating and Chemical Laboratory ATTN: STSFB-CL Aberdeen Proving Ground, Maryland 21005	1
Commander Edgewood Arsenal ATTN: SAREA-TS-A Aberdeen Proving Ground, Maryland 21010	1
Commander Picatinny Arsenal ATTN: SARPA-TS-S, Mr. M. Costello Dover, New Jersey 07801	1
Commander Rock Island Arsenal Research and Development ATTN: 9320 Rock Island, Illinois 61201	1
Commander Watervliet Arsenal Watervliet, New York 12189	1
Commander US Army Aviation Systems Command ATTN: DRSAB-EE -MT, Mr. Vollmer St. Louis, Missouri 63166	1 1
Commander US Army Aeronautical Depot Maintenance Center (Mail Stop) Corpus Christi, Texas 78403	1
Commander UA Army Test and Evaluation Command ATTN: DRSTE-RA Aberdeen Proving Ground, Maryland 21005	1
Commander ATTN: STEAP-MT Aberdeen Proving Ground, Maryland 21005	1

DISTRIBUTION

	<u>No. of Copies</u>
Chief Bureau of Naval Weapons Department of the Navy Washington, DC 20390	1
Chief Bureau of Ships Department of the Navy Washington, DC 20315	1
Naval Research Laboratory ATTN: Dr. M. M. Krafft Code 8430 Washington, DC 20375	1
Commander Wright Air Development Division ATTN: ASRC Wright-Patterson AFB, Ohio 45433	1
Director Air Force Materiel Laboratory ATTN: AFML-DO-Library Wright-Patterson AFB, Ohio 45433	1
Director Army Materials and Mechanics Research Center ATTN: DRXMR-PL -MT, Mr. Farrow Watertown, Massachusetts 02172	1 1
Commander White Sands Missile Range ATTN: STEWS-AD-L White Sands Missile Range, New Mexico 88002	1
Jet Propulsion Laboratory California Institute of Technology ATTN: Library/Acquisitions 111-113 4800 Oak Grove Drive Pasadena, California 91103	1
Sandia Laboratories ATTN: Library P. O. Box 969 Livermore, California 94550	1

DISTRIBUTION

	<u>No. of Copies</u>
Commander US Army Air Defense School ATTN: ATSA-CD-MM Fort Bliss, Texas 79916	1
Technical Library Naval Ordnance Station Indian Head, Maryland 20640	1
Commander US Army Materiel Development and Readiness Command ATTN: DRCMT Washington, DC 20315	1
Headquarters SAC/NRI (Stinfo Library) Offutt Air Force Base, Nebraska 68113	1
Commander Rock Island Arsenal ATTN: SARRI-LKPL-Technical Library Rock Island, Illinois 61201	1
Commander (Code 233) Naval Weapons Center ATTN: Library Division China Lake, California 93555	1
Department of the Army US Army Research Office ATTN: Information Processing Office P. O. Box 12211 Research Triangle Park, North Carolina 27709	1
Commander US Army Research Office ATTN: DRXRO-PW, Dr. R. Lontz P. O. Box 12211 Research Triangle Park, North Carolina 27709	2
US Army Research and Standardization Group (Europe) ATTN: DRXSN-E-RX, Dr. Alfred K. Nodoluha Box 65 FPO New York 09510	2

DISTRIBUTION

	<u>No. of Copies</u>
Headquarters Department of the Army Office of the DCS for Research Development and Acquisition Room 3A474, The Pentagon ATTN: DAMA-ARZ Washington, DC 20310	2
US Army Materiel Systems Analysis Activity ATTN: DRXSY-MP Aberdeen Proving Ground, Maryland 21005	1
IIT Research Institute ATTN: GACIAC 10 West 35th Street Chicago, Illinois 60616	1
ADTC (DLDSL) Eglin Air Force Base, Florida 32542	1
University of California Los Alamos Scientific Laboratory ATTN: Reports Library P. O. Box 1663 Los Alamos, New Mexico 87545	1
Commander US Army Materiel Development and Readiness Command ATTN: DRCRD DRCDL 5001 Eisenhower Avenue Alexandria, Virginia 22333	1 1
Director Defense Advanced Research Projects Agency 1400 Wilson Boulevard Arlington, Virginia 22209	1
DRSMI-LP, Mr. Voigt	1
DRSMI- R, RL, Mr. Comus RLA, Mr. Pettey RLA, Mr. Schaeffel	1 1 1 50